

Occasional exhaust fan

11094448

RG GALVA - D450

The RG damper balances airflow in a circular ducting system.



PRODUCT BENEFITS

- can be motorised upwards of diameter 355 mm.

Principles of operation

The flap of the RG is opened and closed by rotating a handle located on a jumper.

Product description

The RG damper balances airflow in a circular ducting system. It is fitted with a top jumper enabling remote insulation without covering the handle.

Fields of application

New, Refurbishment, Non-residential buildings

Installation

- installed in circular ducts.

Reference arguments

Application:

- Serves to balance airflow across all branches of a non-residential or multi-occupancy residential ventilation system

Description:

- Galvanised steel damper diameter 450 mm
- Manual control
- Screw-locked plastic handle, M1 class Lexan shafts

Main characteristics

- galvanised steel,
- metal handle,
- can be motorised upwards of diameter 355 mm using motor plate kit ordered separately.

Accessories


Description	Variants
MOTOR PLATE KIT FOR DIAMETERS 355 to 500 mm	11055122
CM MOTOR 24-L ON/OFF	11055040
TF MOTOR 230 ON/OFF	11055049
TF MOTOR 24 ON/OFF	11055050
CM MOTOR 230-L ON/OFF	11055038

Occasional exhaust fan


11094448
RG GALVA - D450

Dimensional data

Variants	H (mm)	L (mm)	Ø (mm)	Weight (kg)
11094448	80	216	450	3,28



Installation

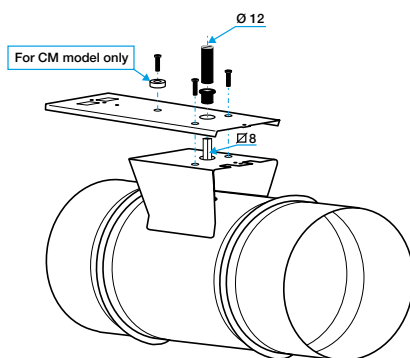

Installation of motor plate