

Occasional exhaust fan

11094451  
RG GALVA - D630

The RG damper balances airflow in a circular ducting system.



## PRODUCT BENEFITS

- can be motorised upwards of diameter 355 mm.

### Principles of operation

The flap of the RG is opened and closed by rotating a handle located on a jumper.

### Product description

The RG damper balances airflow in a circular ducting system. It is fitted with a top jumper enabling remote insulation without covering the handle.

### Fields of application

New, Refurbishment, Non-residential buildings

### Installation

- installed in circular ducts.

### Reference arguments

Application:

- Serves to balance airflow across all branches of a non-residential or multi-occupancy residential ventilation system

Description:

- Galvanised steel damper diameter 630 mm
- Manual control
- Screw-locked plastic handle, M1 class Lexan shafts

### Main characteristics

- galvanised steel,
- metal handle,
- can be motorised upwards of diameter 355 mm using motor plate kit ordered separately.

### Accessories


Description	Variants
CM MOTOR 24-L ON/OFF	11055040
TF MOTOR 230 ON/OFF	11055049
TF MOTOR 24 ON/OFF	11055050
CM MOTOR 230-L ON/OFF	11055038

Occasional exhaust fan


11094451  
RG GALVA - D630

Dimensional data

Variants	H (mm)	L (mm)	Ø (mm)	Weight (kg)
11094451	80	216	630	5,19

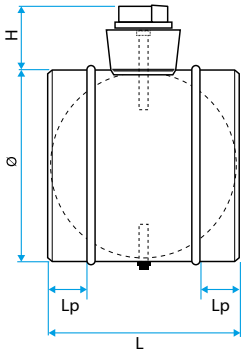

Installation

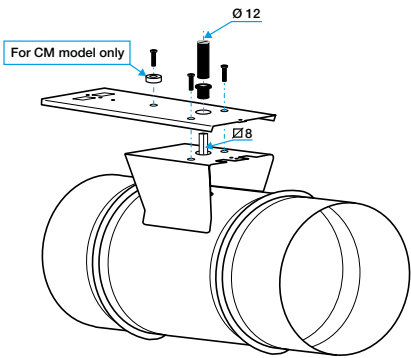

Installation of motor plate