

**Occasional exhaust fan****11098441**  
**RG GALVA +SEAL - D125**

The RG sealed damper balances a circular ducting system, while ensuring a very low leak rate: class D (up to D315) or C (D355 and beyond).

**PRODUCT BENEFITS**

- class D airtight performance (up to 315 mm) as per EN 1751,

**Principles of operation**

The flap of the sealed RG is opened and closed by rotating a handle located on a jumper.

**Product description**

The RG sealed damper balances airflow in a circular ducting system. It features double-lip airtight seals on each junction to minimise leaks with the rest of the system. Its top jumper enables overlaid insulation without covering the handle.

**Fields of application**

Multi-occupancy residential housing, New, Refurbishment, Non-residential buildings

**Installation**

- installed in circular ducts.

**Reference arguments**

Application:

- Airtight airflow balancing across all branches of a non-residential or multi-occupancy residential ventilation system

Description:


- Sealed damper galvanised steel diameter 125 mm
- Manual control
- Screw-locked plastic handle, M1 class Lexan shafts

**Main characteristics**

- class D airtight performance (315 mm and below) and class C (355 mm and above) as per EN 1751,
- galvanised steel,
- metal handle,
- can be motorised upwards of diameter 355 mm using motor plate kit ordered separately.

**Dimensional data**

Variants	H (mm)	L (mm)	Ø (mm)	Weight (kg)
11098441	70	200	125	0,65

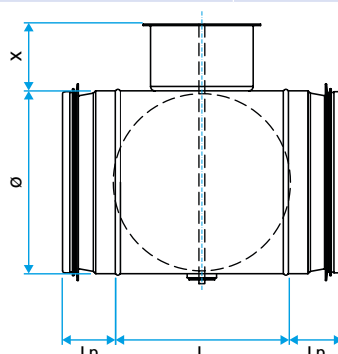


Occasional exhaust fan

11098441  
RG GALVA +SEAL - D125

Regulatory data

Variants	Airtightness class
11098441	D

Installation

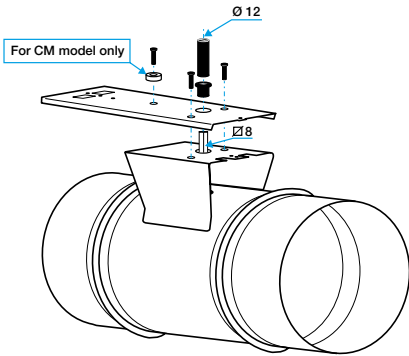

Installation de la platine de motorisation