

Occasional exhaust fan

11094588  
RGP GALVA - D450

The RGP sealed damper precisely balances a circular ducting system. The sealed models also ensure a very low leak rate.



## PRODUCT BENEFITS

- fine airflow adjustment.

### Principles of operation

The flap of the sealed RGP damper is opened and closed by rotating a handle located on a jumper. It contains a slotted or reduced internal disc for finer adjustment of airflow.

### Product description

The RGP and sealed RGP damper finely balance airflow in a circular ducting system. They are fitted with a jumper enabling overlaid insulation without covering the handle.

### Fields of application

Multi-occupancy residential housing, New, Refurbishment, Non-residential buildings

### Installation

- installed in circular ducts.

### Reference arguments

Application:

- Serves to efficiently balance airflow across all branches of a non-residential or multi-occupancy residential ventilation system
- Slotted damper used to prevent total closure of a duct branch

Description:

- Slotted damper galvanised steel diameter 450 mm
- Manual control
- Perforated diaphragm with 40 % open surface, holes diameter 5 mm
- Screw-locked plastic handle, M1 class Lexan shafts

## Occasional exhaust fan

# 11094588

RGP GALVA - D450

### Main characteristics



- up to and including diameter 315 mm:
  - metal handle,
  - reduced inner disc,
  - supplied with seals (class D airtight performance as per EN 1751),
- starting at diameter 355 mm:
  - plastic handle
  - slotted disc with 46% free air passage,
  - supplied without seals,
- galvanised steel,
- can be motorised upwards of diameter 355 mm using motor plate kit (11055122).

### Accessories

Description	Variants
MOTOR PLATE KIT FOR DIAMETERS 355 to 500 mm	11055122
CM MOTOR 24-L ON/OFF	11055040
TF MOTOR 230 ON/OFF	11055049
TF MOTOR 24 ON/OFF	11055050
CM MOTOR 230-L ON/OFF	11055038

### Dimensional data


Variants	H (mm)	L (mm)	Ø (mm)	Weight (kg)
11094588	85	200	450	5

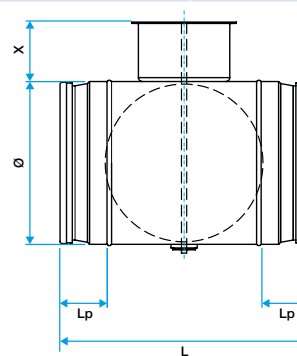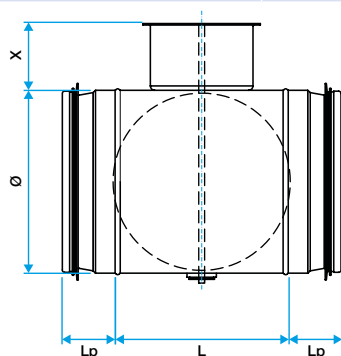

### Regulatory data

Variants	Airtightness class
11094588	C

### Installation

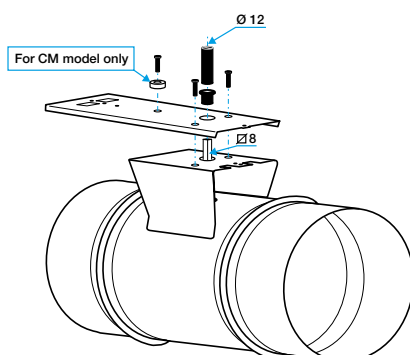

Installation de la platine de motorisation