

Connector

11095043

RM ALU - D125

The RM aluminium male connector connects two aluminium ducts together.



Raccord Mâle en aluminium

PRODUCT BENEFITS

- range compliant with gas CMEV requirements,
- suited to systems operating in saline atmospheres.

Product description

The RM aluminium male connector connects two aluminium ducts together.

Fields of application

Multi-occupancy residential housing, New, Refurbishment, Non-residential buildings

Installation

- easy assembly of interlocking accessories: ducts are female, accessories are male,
- Final seal requires sealant and/or perforated strip,
- attached to duct using self-tapping screws (4 to 6 depending on diameter).

Reference arguments

Application:

- Connects two ducts of same diameter together in multi-occupancy residential gas CMEV system

Description:


- Aluminium connector diameter 125 mm

Main characteristics

- available in diameters from 125 to 500,
- aluminium 1050A-H18 (formerly A5) compliant with DTU 68.3 for gas CMEV,
- M0 fire certification.

Dimensional data

| References | Ø (mm) |
|------------|--------|
| 11095043 | 125 |

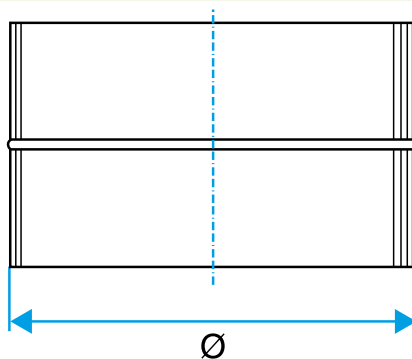

Dimensional drawing aluminium Male Connector

Regulatory data

| References | Fire protection rating |
|------------|------------------------|
| 11095043 | M0 |

Connector

11095043
RM ALU - D125