

Connector

11095045 RM ALU - D160

The RM aluminium male connector connects two aluminium ducts together.



PRODUCT BENEFITS

- range compliant with gas CMEV requirements,
- suited to systems operating in saline atmospheres.

Product description

The RM aluminium male connector connects two aluminium ducts together.

Fields of application

Multi-occupancy residential housing, New, Refurbishment, Non-residential buildings

Installation

- easy assembly of interlocking accessories: ducts are female, accessories are male,
- Final seal requires sealant and/or perforated strip,
- attached to duct using self-tapping screws (4 to 6 depending on diameter).

Reference arguments

Application:

- Connects two ducts of same diameter together in multi-occupancy residential gas CMEV system

Description:

- Aluminium connector diameter 160 mm

Main characteristics


- available in diameters from 125 to 500,
- aluminium 1050A-H18 (formerly A5) compliant with DTU 68.3 for gas CMEV,
- M0 fire certification.

General data

Variants	Main material
11095045	Aluminium

Dimensional data

Variants	Ø (mm)	Ø A (mm)
11095045	160	160

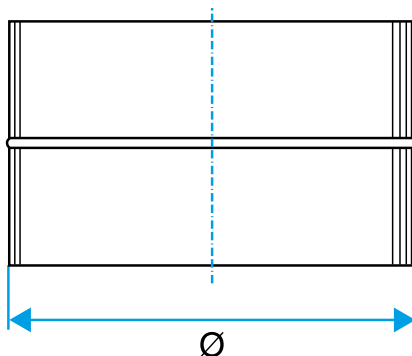

Connector

11095045
RM ALU - D160

Regulatory data

Variants	Fire protection rating
11095045	M0