

## Connector

# 11095045

## RM ALU - D160

The RM aluminium male connector connects two aluminium ducts together.



Raccord Mâle en aluminium

### PRODUCT BENEFITS

- range compliant with gas CMEV requirements,
- suited to systems operating in saline atmospheres.

### Product description

The RM aluminium male connector connects two aluminium ducts together.

### Fields of application

Multi-occupancy residential housing, New, Refurbishment, Non-residential buildings

### Installation

- easy assembly of interlocking accessories: ducts are female, accessories are male,
- Final seal requires sealant and/or perforated strip,
- attached to duct using self-tapping screws (4 to 6 depending on diameter).

### Reference arguments

Application:

- Connects two ducts of same diameter together in multi-occupancy residential gas CMEV system

Description:


- Aluminium connector diameter 160 mm

### Main characteristics

- available in diameters from 125 to 500,
- aluminium 1050A-H18 (formerly A5) compliant with DTU 68.3 for gas CMEV,
- M0 fire certification.

### Dimensional data

References	Ø (mm)
11095045	160

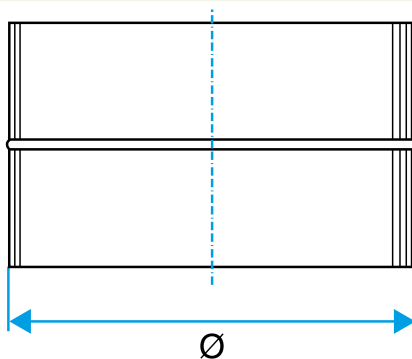

Dimensional drawing aluminium Male Connector

### Regulatory data

References	Fire protection rating
11095045	M0

Connector

11095045  
RM ALU - D160