

**Connector**

## 11095051 RM ALU - D450

The RM aluminium male connector connects two aluminium ducts together.



### PRODUCT BENEFITS

- range compliant with gas CMEV requirements,
- suited to systems operating in saline atmospheres.

### Product description

The RM aluminium male connector connects two aluminium ducts together.

### Fields of application

Multi-occupancy residential housing, New, Refurbishment, Non-residential buildings

### Installation

- easy assembly of interlocking accessories: ducts are female, accessories are male,
- Final seal requires sealant and/or perforated strip,
- attached to duct using self-tapping screws (4 to 6 depending on diameter).

### Reference arguments

Application:

- Connects two ducts of same diameter together in multi-occupancy residential gas CMEV system

Description:

- Aluminium connector diameter 450 mm

### Main characteristics


- available in diameters from 125 to 500,
- aluminium 1050A-H18 (formerly A5) compliant with DTU 68.3 for gas CMEV,
- M0 fire certification.

### General data

Variants	Main material
11095051	Aluminium

### Dimensional data

Variants	Ø (mm)	Ø A (mm)
11095051	450	450

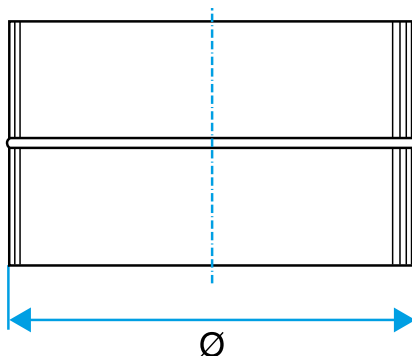

## Connector

**11095051**  
RM ALU - D450

## Regulatory data

Variants	Fire protection rating
11095051	M0