

Connector

11095052 RM ALU - D500

The RM aluminium male connector connects two aluminium ducts together.



PRODUCT BENEFITS

- range compliant with gas CMEV requirements,
- suited to systems operating in saline atmospheres.

Product description

The RM aluminium male connector connects two aluminium ducts together.

Fields of application

Multi-occupancy residential housing, New, Refurbishment, Non-residential buildings

Installation

- easy assembly of interlocking accessories: ducts are female, accessories are male,
- Final seal requires sealant and/or perforated strip,
- attached to duct using self-tapping screws (4 to 6 depending on diameter).

Reference arguments

Application:

- Connects two ducts of same diameter together in multi-occupancy residential gas CMEV system

Description:

- Aluminium connector diameter 500 mm

Main characteristics


- available in diameters from 125 to 500,
- aluminium 1050A-H18 (formerly A5) compliant with DTU 68.3 for gas CMEV,
- M0 fire certification.

General data

| Variants | Main material |
|----------|---------------|
| 11095052 | Aluminium |

Dimensional data

| Variants | Ø (mm) | Ø A (mm) |
|----------|--------|----------|
| 11095052 | 500 | 500 |

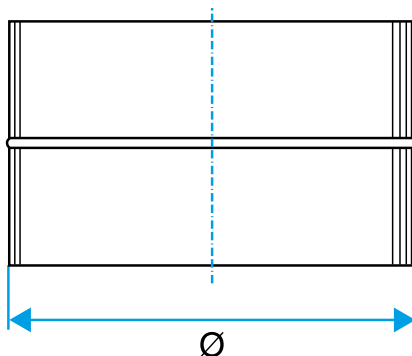

Connector

11095052
RM ALU - D500

Regulatory data

| Variants | Fire protection rating |
|----------|------------------------|
| 11095052 | M0 |