

## Connector

# 11093043

## RM GALVA - D125

The male connector connects two galvanised ducts together.



Raccord Mâle

### Product description

The male connector connects two galvanised ducts together.

### Fields of application

Multi-occupancy residential housing, New, Refurbishment, Non-residential buildings

### Installation

- easy assembly of interlocking accessories: ducts are female, accessories are male,
- Final seal requires sealant and/or perforated strip,
- attached to duct using self-tapping screws (4 to 6 depending on diameter).

### Reference arguments

Application:

- Connects two ducts of same diameter together in non-residential and multi-occupancy residential systems

Description:


- Galvanised steel connector diameter 125 mm

### Main characteristics

- available in diameters from 80 to 900,
- galvanised steel as per EN 10346 ensuring uniformity of coating,
- M0 fire certification.

### Dimensional data

References	Ø (mm)
11093043	125

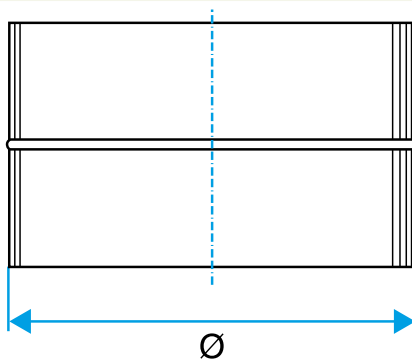

Dimensional drawing Male Connector

### Regulatory data

References	Fire protection rating
11093043	M0

Connector

11093043  
RM GALVA - D125