

**Connector****11093045**  
**RM GALVA - D160**

The male connector connects two galvanised ducts together.



Raccord Mâle

**Product description**

The male connector connects two galvanised ducts together.

**Fields of application**

Multi-occupancy residential housing, New, Refurbishment, Non-residential buildings

**Installation**

- easy assembly of interlocking accessories: ducts are female, accessories are male,
- Final seal requires sealant and/or perforated strip,
- attached to duct using self-tapping screws (4 to 6 depending on diameter).

**Reference arguments**

Application:

- Connects two ducts of same diameter together in non-residential and multi-occupancy residential systems

Description:


- Galvanised steel connector diameter 160 mm

**Main characteristics**

- available in diameters from 80 to 900,
- galvanised steel as per EN 10346 ensuring uniformity of coating,
- M0 fire certification.

**Dimensional data**

References	Ø (mm)
11093045	160

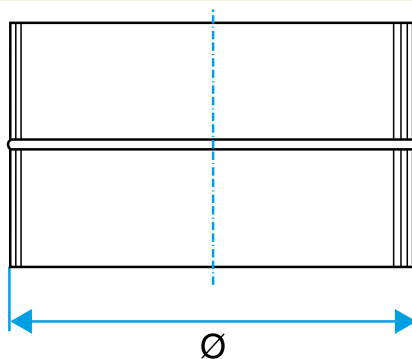

Dimensional drawing Male Connector

**Regulatory data**

References	Fire protection rating
11093045	M0

Connector

11093045  
RM GALVA - D160