

The male connector connects two galvanised ducts together.



Raccord Mâle

# **Product description**

The male connector connects two galvanised ducts together.

### Fields of application

Multi-occupancy residential housing, New, Refurbishment, Non-residential buildings Installation

- easy assembly of interlocking accessories: ducts are female, accessories are male,
- Final seal requires sealant and/or perforated strip,
- attached to duct using self-tapping screws (4 to 6 depending on diameter).

### **Reference arguments**

Application:

• Connects two ducts of same diameter together in non-residential and multi-occupancy residential systems

#### Description:


• Galvanised steel connector diameter 800 mm

# **Main characteristics**

- available in diameters from 80 to 900,
- galvanised steel as per EN 10346 ensuring uniformity of coating,
- M0 fire certification.

# **Dimensional data**

11093054

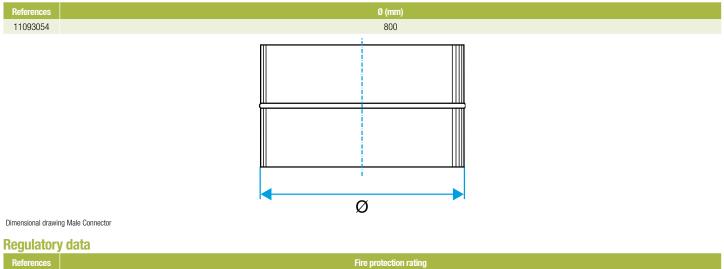

M0



Rigid galvanised ductwork, Aluminium and Special



