



The RMO oblong male connector connects two galvanised oblong ducts together.



Oblong Male Connector

# **PRODUCT BENEFITS**

small size for high airflow,
good airtight performance and controlled pressure losses,
easy to install and maintain (no inaccessible corners).

## Product description

The RMO oblong male connector connects two galvanised oblong ducts together.

## **Fields of application**

Multi-occupancy residential housing, New, Refurbishment, Non-residential buildings Installation

- easy assembly of interlocking accessories: ducts are female, accessories are male,
- Final seal requires sealant and/or perforated strip,
- attached to duct using self-tapping screws (4 to 6 depending on diameter).

## **Reference arguments**

Application:

- Oblong accessories for installation of ventilation systems in confined spaces (suspended ceiling, horizontal side flues conveying high airflow, etc.)
- · Connection between two oblong ducts of same dimensions

### Description:


- Oblong male connector made of galvanised steel.
- Length 360 mm and height 80 mm.

## Main characteristics

- standard dimensions (20 oblong sections),
- galvanised steel as per EN 10346 ensuring uniformity of coating,

#### • M0 fire certification.

### **Dimensional data**

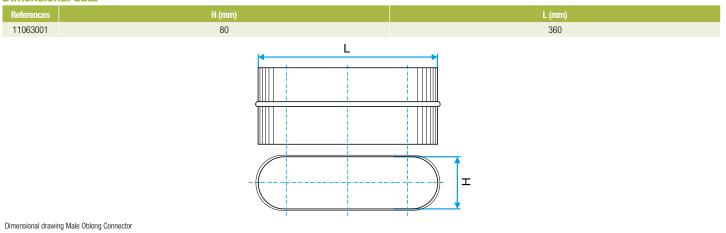



11063001 RM0 GALVA - 360x80

Regulatory data

References 11063001

MO