

## Connector

# 11063008

## RMO GALVA - 515x215

The RMO oblong male connector connects two galvanised oblong ducts together.



Oblong Male Connector

### PRODUCT BENEFITS

- small size for high airflow,
- good airtight performance and controlled pressure losses,
- easy to install and maintain (no inaccessible corners).

### Product description

The RMO oblong male connector connects two galvanised oblong ducts together.

### Fields of application

Multi-occupancy residential housing, New, Refurbishment, Non-residential buildings

### Installation

- easy assembly of interlocking accessories: ducts are female, accessories are male,
- Final seal requires sealant and/or perforated strip,
- attached to duct using self-tapping screws (4 to 6 depending on diameter).

### Reference arguments

Application:

- Oblong accessories for installation of ventilation systems in confined spaces (suspended ceiling, horizontal side flues conveying high airflow, etc.)
- Connection between two oblong ducts of same dimensions

Description:


- Oblong male connector made of galvanised steel.
- Length 515 mm and height 215 mm.

### Main characteristics

- standard dimensions (20 oblong sections),
- galvanised steel as per EN 10346 ensuring uniformity of coating,
- MO fire certification.

### Dimensional data

| References | H (mm) | L (mm) |
|------------|--------|--------|
| 11063008   | 215    | 515    |

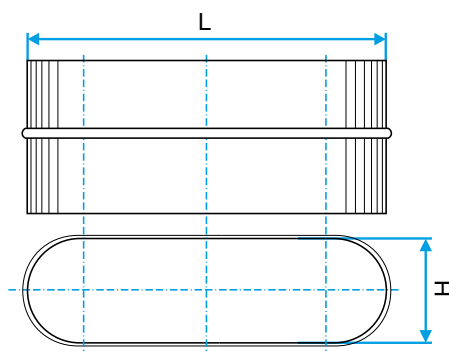

Dimensional drawing Male Oblong Connector

### Connector

**11063008**  
RMO GALVA - 515x215

### Regulatory data

| References | Fire protection rating |
|------------|------------------------|
| 11063008   | M0                     |