
Connector



The ROCTP oblong cylindrical tangent reducer is used to connect an oblong duct with a circular duct while maintaining a linear and flat ducting without losing space underneath.



Oblong Tangent Cylindrical Reducer on flat section:

PRODUCT BENEFITS

small size for high airflow, good airtight performance and controlled pressure losses, easy to install and maintain (no inaccessible corners).

Product description

The ROCTP oblong cylindrical tangent reducer is used to connect an oblong duct with a circular duct while maintaining a linear and flat ducting without losing space underneath.

Fields of application

Multi-occupancy residential housing, New, Refurbishment, Non-residential buildings

Installation

- easy assembly of interlocking accessories: ducts are female, accessories are male,
- Final seal requires sealant and/or perforated strip,
- attached to duct using self-tapping screws (4 to 6 depending on diameter).

Reference arguments

Application:

- Oblong accessories for installation of ventilation systems in confined spaces (suspended ceiling, horizontal side flues conveying high airflow, etc.)
- Cylindrical tangential oblong reducer used to connect oblong ducting to circular ducting while retaining a linear, flat system without losing space underneath


Description:

- ROCTP cylindrical tangential oblong reducer on flat section, galvanised steel
- Length 675 mm and height 215 mm Diameter 400 mm

Main characteristics

- standard dimensions (20 oblong sections),
- galvanised steel as per EN 10346 ensuring uniformity of coating,
- M0 fire certification.

Dimensional data

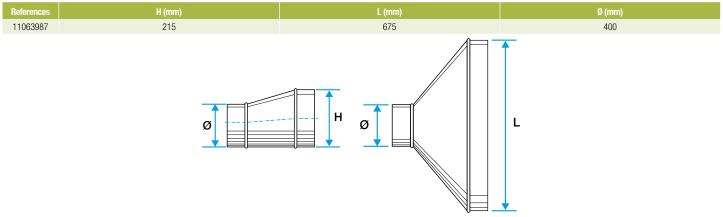

Dimensional drawing Oblong Tangent Cylindrical Reducer on flat section

Connector

11063987 ROCTP GALVA - 675x215 - D400

Regulatory data

References 11063987

M0