

## Connector

# 11064010

## ROCTP GALVA - 820x320 - D450

The ROCTP oblong cylindrical tangent reducer is used to connect an oblong duct with a circular duct while maintaining a linear and flat ducting without losing space underneath.



Oblong Tangent Cylindrical Reducer on flat section:

### PRODUCT BENEFITS

- small size for high airflow,
- good airtight performance and controlled pressure losses,
- easy to install and maintain (no inaccessible corners).

### Product description

The ROCTP oblong cylindrical tangent reducer is used to connect an oblong duct with a circular duct while maintaining a linear and flat ducting without losing space underneath.

### Fields of application

Multi-occupancy residential housing, New, Refurbishment, Non-residential buildings

### Installation

- easy assembly of interlocking accessories: ducts are female, accessories are male,
- Final seal requires sealant and/or perforated strip,
- attached to duct using self-tapping screws (4 to 6 depending on diameter).

### Reference arguments

Application:

- Oblong accessories for installation of ventilation systems in confined spaces (suspended ceiling, horizontal side flues conveying high airflow, etc.)
- Cylindrical tangential oblong reducer used to connect oblong ducting to circular ducting while retaining a linear, flat system without losing space underneath

Description:


- ROCTP cylindrical tangential oblong reducer on flat section, galvanised steel
- Length 820 mm and height 320 mm - Diameter 450 mm

### Main characteristics

- standard dimensions (20 oblong sections),
- galvanised steel as per EN 10346 ensuring uniformity of coating,
- M0 fire certification.

### Dimensional data

References	H (mm)	L (mm)	Ø (mm)
11064010	320	820	450

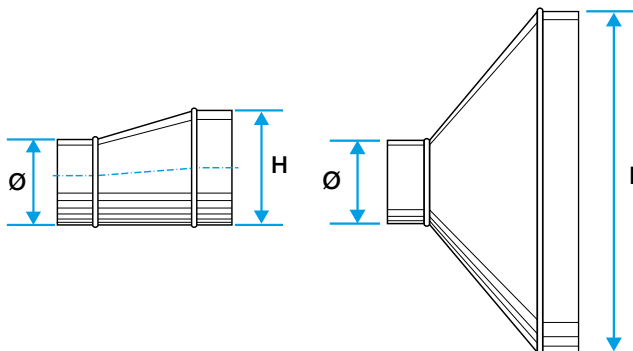

Dimensional drawing Oblong Tangent Cylindrical Reducer on flat section

### Connector

# 11064010

## ROCTP GALVA - 820x320 - D450

### Regulatory data

References	Fire protection rating
11064010	M0