

Heat and smoke exhaust flap grille

11050017

SC125 F3 600X300

The SC 125 slotted grille offers discreet aesthetics for air extraction in ventilation or air-conditioning systems.



PRODUCT BENEFITS

- aesthetic,
- easy to install / remove.

Principles of operation

The SC 125 wall grille is made of slotted metal sheet with 45% of free air passage, to enable air extraction. It uses F3 clips for easy installation/removal in ME/MT plenums and has an F4 mounting frame.

Product description

The SC 125 wall grille delivers air extraction in ventilation or air-conditioning systems. Its construction in slotted sheet metal with 45% of free air passage and its white epoxy coating enable discreet installation on walls. Furthermore, its F3 clips as standard make it easy to install and remove in plenums or mounting frames.

Fields of application

New, Refurbishment, Non-residential buildings

Installation

- for installation on wall,
- grille supplied with F3 clips for easy installation / removal in ME/MT plenums or in the F4 mounting frame.

Main characteristics

- slotted wall-mounted grille with 45% free air passage,
- steel with epoxy paint finish, RAL 9003 white 30%,
- concealed F3 attachment using friction clips.
- dimensions from 75 x 75 to 1,200 x 600 mm with increments of 25 mm in length.

Accessories

Description	Variants
Adapter F4 600X300	11053775
PLEN. ME F3 600X300/D250 PC	11053684
MTF3 600X300/D250 PLENUM PA	11053654
MTF3 PLENUM PA	11053703
RECT DAMPER SGS 600X300	11053255
ME Plenum F3 600x300/D250 PC cfg	11053569
MT Plenum F3 600X300/D250 PA cfg	11053500

General data



Variants	Main material	Type of finish	Colour
11050017	Aluminium	Epoxy paint	Lagoon blue

Heat and smoke exhaust flap grille

11050017
SC125 F3 600X300

Dimensional data

Variants	H (mm)	L (mm)	Ø plenum (mm)
11050017	300	600	250

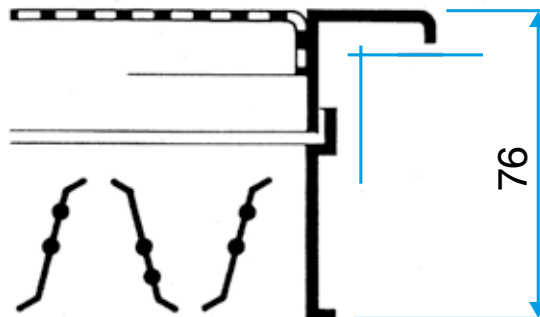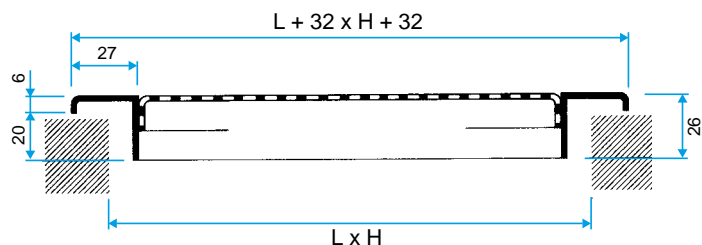

Airflow data

Variants	Comfort airflow for $Lw < NR 25$ (m ³ /h)
11050017	1200