

Ceiling diffuser

11002149

SC319R 562x562 D315 AxB=600²

The SC 319 R is a slotted plate square diffuser for extraction.



SC319R F16 D315 562x562 AxB 600x600

PRODUCT BENEFITS

- circular connection for faster installation,
- filtration for extraction.

Principles of operation

The SC 319 R diffuser is installed on a plaster or BA13 ceiling. It opens to enable easy access for installation of the filter and maintenance.

Product description

The SC 319 R is a square slotted opening air return diffuser. For installation in plaster and plasterboard (BA13) ceilings. Diffuses air in HVAC systems. This diffuser is made of steel with epoxy coating RAL 9010 white 30% gloss. It features concealed attachments and is connected directly to circular ducting.

Fields of application

Non-residential buildings

Installation


The SC 319 R diffuser is installed flush with the ceiling. Direct attachment to ducting.

Main characteristics

- extraction diffuser,
- removable slotted plate,
- epoxy coating RAL 9010 white,
- concealed attachment to concrete slab using tabs fitted to diffuser (F16 attachment method),
- direct attachment to circular ducting.

Supplementary characteristics

- accessories:
 - G3 flat filter with M1 fire certification,
 - galvanised steel plenum with side branch connection (NE).

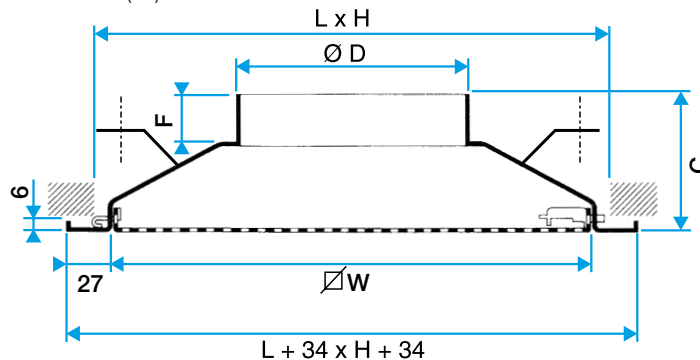

Diffuseur SC 319 R