

Ceiling diffuser**11002635**
SC369R D160 AxB=600x600 (c66.3)

The SC 369 R is a slotted plate square diffuser for extraction.



Diffuser SC 369R

PRODUCT BENEFITS

- for 600x600 and 675x675 mm suspended ceiling tiles,
- circular connection for faster installation,
- filtration for extraction.

Principles of operation

The SC 369 R diffuser is installed in the place of a standard 600x600 or 675x675 mm suspended ceiling tile. It opens to enable easy access for installation of the filter and maintenance.

Product description

The SC 369 R is a slotted plate square opening extraction diffuser. It is installed in place of a 600X600 or 675X675 ceiling tile. Extracts air in HVAC systems. This diffuser is made of steel with epoxy coating RAL 9010 white 30% gloss. It features concealed attachments. Direct attachment to a circular duct.

Fields of application

Non-residential buildings

Installation

The SC 319 R diffuser is installed flush with the ceiling. Direct attachment to ducting.

Main characteristics

- SC 369R square return air diffuser with opening slotted plate,
- steel with epoxy paint:
 - standard: RAL 9003 white 30% matt,
 - option: other RAL.
- flush-mounted on ceiling for 600X600 or 675X675 ceiling tile,
- concealed attachment:
 - F0: screws in the side of the neck,
 - F16: with 3 brackets riveted to shell.
- connection:
 - directly to a circular duct,
 - using a plenum (accessory).
- thermal insulation on outside of shell (optional).


Ceiling diffuser

11002635

SC369R D160 AxB=600x600 (c66.3)

Supplementary characteristics

- accessories:
 - G3 flat filter with M1 fire certification,
 - galvanised steel plenum with side branch connection (NE).

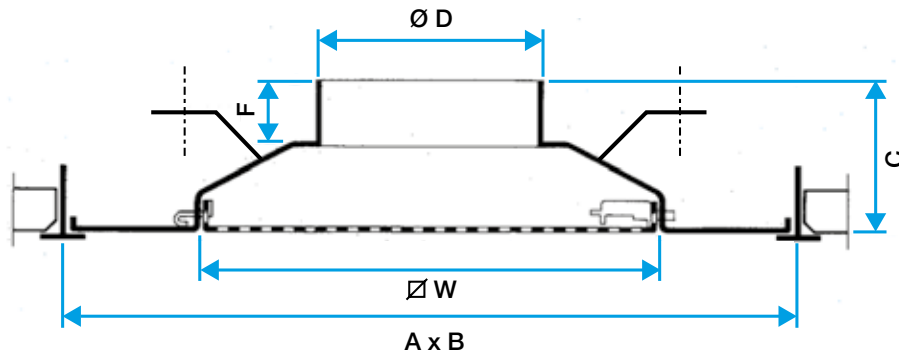

Diffuseur SC 369 R