#### Ceiling diffuser

# 11002646 SC369R D200 AxB=675x675 (c675.4)

The SC 369 R is a slotted plate square diffuser for extraction.



Diffuser SC 369R

#### PRODUCT BENEFITS

- for 600x600 and 675x675 mm suspended ceiling tiles,
  circular connection for faster installation,
- filtration for extraction.

#### **Principles of operation**

The SC 369 R diffuser is installed in the place of a standard 600x600 or 675x675 mm suspended ceiling tile. It opens to enable easy access for installation of the filter and maintenance.

#### **Product description**

The SC 369 R is a slotted plate square opening extraction diffuser. It is installed in place of a 600X600 or 675X675 ceiling tile. Extracts air in HVAC systems. This diffuser is made of steel with epoxy coating RAL 9010 white 30% gloss. It features concealed attachments. Direct attachment to a circular duct.

#### **Fields of application**

Non-residential buildings

#### Installation

The SC 319 R diffuser is installed flush with the ceiling. Direct attachment to ducting.

#### **Main characteristics**

- SC 369R square return air diffuser with opening slotted plate,
- steel with epoxy paint:
- standard: RAL 9003 white 30% matt,
- option: other RAL.
- flush-mounted on ceiling for 600X600 or 675X675 ceiling tile,
- concealed attachment:
- F0: screws in the side of the neck.
- F16: with 3 brackets riveted to shell.
- connection:
- directly to a circular duct,
- using a plenum (accessory).
- thermal insulation on outside of shell (optional).






## **Ceiling diffuser**

# $\begin{array}{c} 11002646 \\ \text{SC369R D200 AxB=} 675\text{x}675 \text{ (c}675.4) \end{array}$

## **Supplementary characteristics**

- accessories:
- G3 flat filter with M1 fire certification,
- galvanised steel plenum with side branch connection (NE).

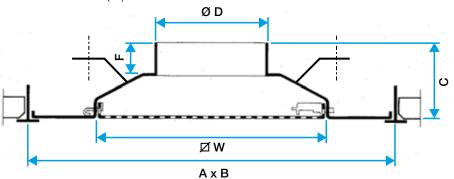

Diffuseur SC 369 R

