

Ceiling diffuser**11051549**
SF704 F0 225X225

The SF 704 is a steel square ceiling diffuser with 4 air diffusion directions, for use in commercial buildings.



SF704 F0 225X225

PRODUCT BENEFITS

- filter for return (optional),
- filter accessed by simply and quickly removing the central core,
- for 600 x 600 suspended ceiling tiles.

Principles of operation

The SF 704 diffuser is installed on the ceiling using visible or concealed attachments. The steel square diffuser offers 4 air diffusion directions.

Product description

The SF 704 is a steel square ceiling diffuser with 4 diffusion directions for ventilation or air-conditioning systems in commercial buildings. This diffuser is made of steel with epoxy coating RAL 9010 white 30% gloss. It is installed flush with the ceiling. Available in dimensions from 150x150 mm to 600x600 mm.

Fields of application

Non-residential buildings

Installation

The SF 704 diffuser is installed flush with the ceiling using visible or concealed attachments in the frame. A concealed screw and suspension bridge attachment system is also available and preferred for installation on fixed ceilings.

Reference arguments

- External frame and core made of assembled extruded aluminium profiles or formed steel plate.
- Spring system enabling removable core for access to interior.
- AF 704: anodised aluminium with natural satin finish or RAL 9010 white epoxy paint.
- SF 704: steel with epoxy paint finish RAL 9010 white.
- Concealed attachment to plenum using side screws in the neck.
- The plenum is fitted with brackets for attachment to a concrete slab.

Main characteristics

- square ceiling diffuser,
- multi-direction horizontal air diffusion,
- 4 diffusion directions,
- profiled steel plate outer frame and core,
- removable, exchangeable core,
- frame width 32 mm,
- epoxy coating RAL 9010 white 30% gloss,
- installed flush with ceiling,
- available in dimensions from 150x150 mm to 600x600 mm.

Ceiling diffuser

11051549

SF704 F0 225X225

Supplementary characteristics

- accessories:
 - B 700: counter-rotary damper, adjustable from front of diffuser,
 - W4 G3 pleated filter M1 fire certification for use on extraction,
 - galvanised steel connection plenum with RT or RE branch connection.

Accessories


Désignations	References
RT plenum F0 225X225 D160	11053583
REIF plenum (5) F0 225X225 D160	11053594
RE plenum F0 225X225 D160	11053613
DAMPER B700 225X225	11051322
Bare W4 G3 filter (replacement)	11053370
RE square plenum 225x225 D160 PC cfg	11053385
RT square plenum 225x225 D160 PA cfg	11053523
RE Plenum 150x150 D125 PC Insulated 5 sides cfg	11053395
RE Plenum 225x225 D160 PC Insulated 5 sides cfg	11053396

Consumables

Désignations	References
Filter cartridge (G3 filter included) CW4 for plenum RT and RE 225x225 mm	11053432
Bare W4 G3 filter (replacement) 225x225	11053372

Dimensional data

References	A (mm)	B (mm)	L x H (mm)	N (mm)	P (mm)	P1 (mm)	Ø D (mm)
11051549	289	349	225X225	223	270	115	160

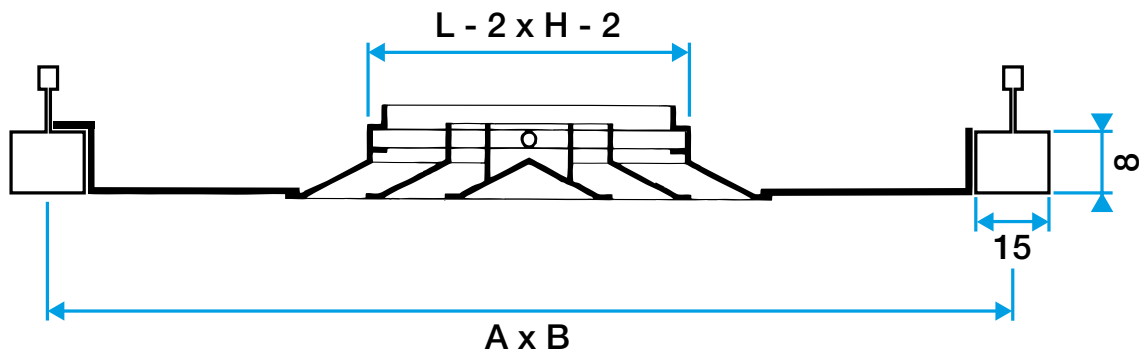

Diffuseur SF 704

Airflow data

References	Comfort airflow for Lw 40 dB(A) (extract with filter) (m ³ /h)	Comfort airflow for Lw 40 dB(A) (air supply) (m ³ /h)
11051549	230	320