

Core terminal**11052226**
SR 143 D100

The SR 143 steel core terminal with on-site adjustable airflow is used for air return.



SR 143 D100

PRODUCT BENEFITS

- adjustable airflow,
- wall connection sleeve supplied.

Principles of operation

The SR 143 terminal is fitted with an adjustable core to calibrate the airflow on site.

Product description

The SR 143 terminal has an adjustable core, which makes it possible to adjust the return airflow in the room.

Fields of application

New, Refurbishment, Non-residential buildings

Installation

- wall or ceiling installation,
- attached directly in duct using a connection sleeve.

Reference arguments

Application:

- Return air only.
- For all exhaust or heat recovery applications in small non-residential buildings.
- Wall or ceiling mounted.

Description:

- Steel with epoxy coating RAL 9010 white.
- Outer ring fitted with airtight seal.
- Adjustable central core.

Main characteristics

- Steel with white epoxy paint finish, RAL 9003 30% matt,
- adjustable airflow due to adjustable core with counter-nut,
- outer ring fitted with airtight seal,
- wall connection sleeve supplied,
- wall or ceiling installation

Accessories

Désignations	References
Smooth plasterboard sleeve L100 pour SR 143-145	11053356

General data

References	Type of finish	Colour
11052226	Epoxy paint	Lagoon blue


Core terminal

11052226

SR 143 D100

Dimensional data

References	L (mm)	L1 (mm)	L2 (mm)	P1 (mm)	Ø A (mm)	Ø D (mm)
11052226	47	50	130	62	100	137

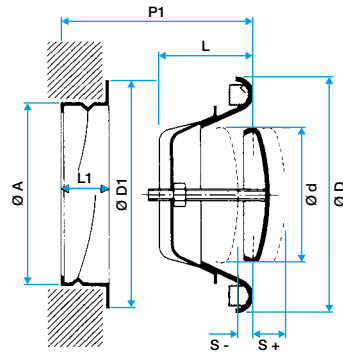

Bouche SR 143 avec manchette

Airflow data

References	Comfort airflow for Lw < NR 30
11052226	80