

Core terminal

11052229

SR 143 D200

The SR 143 steel core terminal with on-site adjustable airflow is used for air return.



SR 143 D200

PRODUCT BENEFITS

- adjustable airflow,
- wall connection sleeve supplied.

Principles of operation

The SR 143 terminal is fitted with an adjustable core to calibrate the airflow on site.

Product description

The SR 143 terminal has an adjustable core, which makes it possible to adjust the return airflow in the room.

Fields of application

New, Refurbishment, Non-residential buildings

Installation

- wall or ceiling installation,
- attached directly in duct using a connection sleeve.

Reference arguments

- SR 143 core terminal for return air D200
- Steel with epoxy paint RAL 9010 white, 30% gloss
- Adjustable airflow using counter-nut locked core
- Outer ring fitted with airtight seal
- Wall or ceiling-mounted
- Slotted into the duct using the steel connection sleeve supplied

Main characteristics

- Steel with white epoxy paint finish, RAL 9003 30% matt,
- adjustable airflow due to adjustable core with counter-nut,
- outer ring fitted with airtight seal,
- wall connection sleeve supplied,
- wall or ceiling installation

Accessories

Désignations	References
Smooth plasterboard sleeve L100 pour SR 143-145	11053359

General data

References	Type of finish	Colour
11052229	Epoxy paint	Lagoon blue


Core terminal

11052229

SR 143 D200

Dimensional data

References	L (mm)	L1 (mm)	L2 (mm)	P1 (mm)	Ø A (mm)	Ø D (mm)
11052229	75	50	130	62	200	248

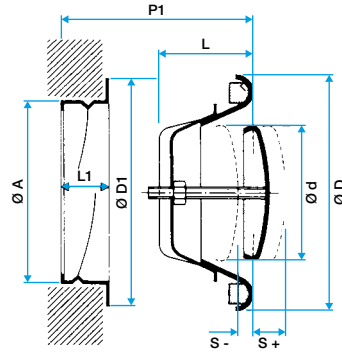

Bouche SR 143 avec manchette

Airflow data

References	Comfort airflow for Lw < NR 30
11052229	190