

Core terminal**11052207**
SR 145 D200

The SR 145 steel core terminal with on-site adjustable airflow is used for air supply.



SR 145 D200

PRODUCT BENEFITS

- adjustable airflow,
- wall connection sleeve supplied.

Principles of operation

The SR 145 terminal is fitted with an adjustable core to calibrate the airflow on site.

Product description

The SR 145 terminal has an adjustable core, which makes it possible to adjust the supply airflow in the room.

Fields of application

New, Refurbishment, Non-residential buildings

Installation

- wall or ceiling installation,
- attached directly in duct using a connection sleeve.

Reference arguments

- SR 135: steel, epoxy paint finish RAL 9010 white.
- SR 143: steel, epoxy paint finish RAL 9010 white.
- SR 145: steel, epoxy paint finish RAL 9010 white.
- SR 149: white polypropylene.
- Fixed in place using standard or extended connection sleeve with claws (suited to mounting in plasterboard).
- Adjustable central core.
- Position locked with counter screw after adjustment.
- Outer ring fitted with airtight seal (SR 143, SR 145 and SR 149).
- SR 135: The central core is fitted with an acoustic absorbent material to ensure a low sound power level.

Main characteristics

- Steel with white epoxy paint finish, RAL 9003 matt 30%,
- adjustable airflow due to adjustable core with counter-nut,
- outer ring fitted with airtight seal,
- wall connection sleeve supplied.

Accessories

Désignations	References
Smooth plasterboard sleeve L100 pour SR 143-145	11053359

General data

References	Type of finish	Colour
11052207	Epoxy paint	Lagoon blue


Core terminal

11052207

SR 145 D200

Dimensional data

References	L (mm)	L1 (mm)	L2 (mm)	P1 (mm)	Ø A (mm)	Ø D (mm)
11052207	75	50	130	62	200	248

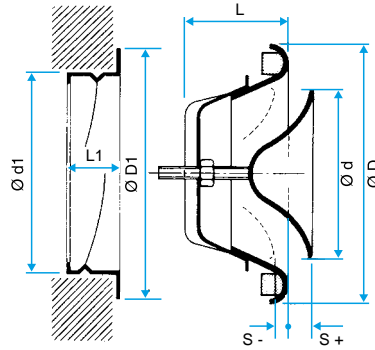

Bouche SR 145 avec manchette

Airflow data

References	Comfort airflow for Lw < NR 30
11052207	190