

**Core terminal**

# 11001997

## SR 149 D125

The SR 149 plastic core terminal with on-site adjustable airflow is used for air supply.



SR 149 D125

### PRODUCT BENEFITS

- adjustable airflow,
- wall connection sleeve supplied.

### Principles of operation

The SR 149 terminal is fitted with an adjustable core to calibrate the airflow on site.

### Product description

The SR 149 terminal has an adjustable core, which makes it possible to adjust the supply or return airflow in the room.

### Fields of application

New, Refurbishment, Non-residential buildings

### Installation

- wall or ceiling installation,
- attached directly in duct using a connection sleeve.

### Reference arguments

- SR 135: steel, epoxy paint finish RAL 9010 white.
- SR 143: steel, epoxy paint finish RAL 9010 white.
- SR 145: steel, epoxy paint finish RAL 9010 white.
- SR 149: white polypropylene.
- Fixed in place using standard or extended connection sleeve with claws (suited to mounting in plasterboard).
- Adjustable central core.
- Position locked with counter screw after adjustment.
- Outer ring fitted with airtight seal (SR 143, SR 145 and SR 149).
- SR 135: The central core is fitted with an acoustic absorbent material to ensure a low sound power level.

### Main characteristics

- plastic (PE) RAL 9010 white,
- adjustable airflow with counter-nut locked core,
- outer ring fitted with airtight seal,
- wall connection sleeve supplied.

### General data

References	Type of finish	Colour
11001997	Epoxy paint	Lagoon blue


## Core terminal

# 11001997

## SR 149 D125

### Dimensional data

References	Ø B (mm)	Ø C (mm)	Ø D (mm)	Ø D1 (mm)
11001997	125	100	170	155

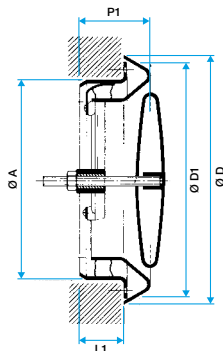

Bouche SR 149 avec manchette

### Airflow data

References	Comfort airflow for Lw < NR 30
11001997	100