

Swirl jet diffuser**11051109****SR 861 F0 D315 (c31) RAL9010-85%**

The SR 861 is a fixed high-induction swirl jet diffuser for air diffusion in commercial buildings.



SR 861 F0 D315 (c31) RAL9010-85%

PRODUCT BENEFITS

- ideal for cooling,
- excellent mixing rate.

Principles of operation

The SR 861 diffuser can be installed in any type of ceiling. It offers fixed swirl jet diffusion ideal for air conditioning systems handling large temperature differences and low-ceiling rooms.

Product description

The SR 861 is a high-induction swirl jet diffuser for air diffusion in ventilation or air conditioning systems in commercial buildings. It offers a high mixing capacity for fast homogenisation of temperatures. It is ideal for air conditioning systems handling large temperature differences and low-ceiling rooms. It is made of steel with an epoxy coating RAL 9010 white 85% finish. Available in diameters from 125 to 315 mm.

Fields of application

Non-residential buildings

Installation

The SR 861 diffuser is installed in a suspended ceiling using a concealed screw attachment on the sides of the diffuser or on a plaster / BA13 ceiling using a visible attachment with the centre screw and a bridge. The system must be attached to the concrete slab using the tabs on the plenum.

Reference arguments

- Steel body and diffusion vanes.
- Steel finish, epoxy paint RAL 9010 white.
- Concealed attachment using a screw on the neck of the diffuser.

Main characteristics

- fixed swirl jet ceiling diffuser,
- high mixing capacity for fast homogenisation of temperatures,
- ideal for air conditioning systems with large temperature differences and low ceilings,
- steel body and vanes,
- circular diffuser with circular connection,
- epoxy coating RAL 9010 white 85%,
- attachment:
 - concealed screw attachment in diffuser neck,
 - visible central screw and bridge.

Swirl jet diffuser

11051109

SR 861 F0 D315 (c31) RAL9010-85%

Supplementary characteristics


- accessories:
 - BR: butterfly type damper with 2 V-shaped vanes,
 - LRE connection plenum with side branch connection.
- optional flow splitter,
- available in standard version or insulated on 2/5 sides.

Accessories

Désignations	References
PLENUM LRE842/883 F0 D315/315	11053314
BR CIRCULAR DAMPER D315	11053223
LRE Plenum diff circular F0 D315 PC cfg	11053349
LRE plenum insul diff circular 5 sides F0 D315 PC cfg	11053369

Dimensional data

References	P (mm)	Ø A (mm)	Ø B (mm)	Ø D (mm)	Ø plenum connection (mm)
11051109	460	415	385	315	315

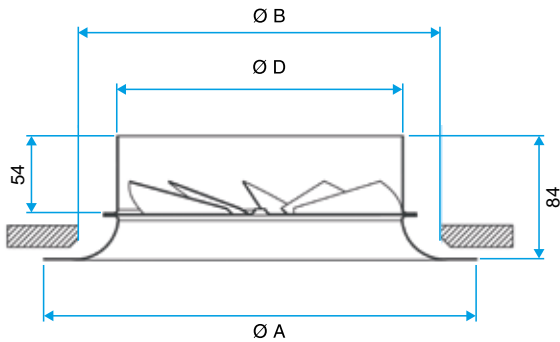

SR 861 diffuser

SR 861 diffuser with LRE plenum

Airflow data

References	Comfort airflow < 35 dB(A) (m³/h)
11051109	420