

# 11024132

## TAHA® MICRO-WATT T 560

The roof fan range that makes ventilation easier.



Taha-MW

### PRODUCT BENEFITS

- airflow from 650 to 16000 m<sup>3</sup>/h,
- optional constant pressure controller kit,
- refined design,
- wide range of installation accessories,
- ErP-compliant with speed controller or controller kit.

### REGLEMENTATIONS AND COMPLIANCES

Technical Opinion no.: 14.5/16-2185\_V2

### Principles of operation

Low-consumption roof exhaust fan with horizontal discharge for CMEV in multi-occupancy housing and non-residential buildings.

### Product description

Aluminium housing for good corrosion resistance, EC motor for low energy consumption, horizontal discharge.

### Fields of application

Multi-occupancy residential housing, New, Refurbishment, Non-residential buildings

### Installation

- horizontal air outlet,
- flat or sloping roof with masonry base or accessory.

### Reference arguments

Application:

- Low consumption roof exhaust fan for flat or sloping roof, horizontal jet, 12000 m<sup>3</sup>/h
- Designed for multi-occupancy residential or non-residential CMEV

Description:

- Aluminium unit for good corrosion resistance
- Anti-bird screen
- Backward curve centrifuge impeller
- Temperature control built into motor
- Asynchronous EC motor 3-phase IP54
- Optional constant pressure controller kit with 2 possible values (day/night)
- Direct control possible via 0-10V using speed controller

# 11024132

## TAHA® MICRO-WATT T 560

### Main characteristics

- 6 sizes available from 600 to 16000 m<sup>3</sup>/h,
- made of weatherproof AlMg3 aluminium with a very low height. The motor unit tilts for easy installation (optional accessories) and maintenance,
- air outlet features a protective screen against intrusion, birds, and other foreign objects,
- backward curve centrifuge impeller balanced on the motor according to quality class G 6.3 of DIN / ISO 1940,
- drive motor designed for maintenance-free operation, thanks to its ball bearings with lifetime lubrication,
- the motor is protected by a thermal contact integrated in the winding,
- lockable proximity switch as standard,
- EC low-consumption motor,
- single-phase or 3-phase power supply depending on size,
- direct control possible via 0-10V,
- optional constant pressure controller kit with 2 possible values (day/night).

### Accessories


Désignations	References
Backdraft damper Ø 560	11024465
Pressure sensor + tube kit (2 m tube)	11024466
Constant pressure control kit	11024467
Flexible sleeve 560	11024460
Connection flange D560	11024455
Insulated flat roof base TAHA-TAVA 280	11024441
INSULATED STACK BASE 560 INCLINED ROOF	11024254
Insulated flat roof base TAHA-TAVA 220	11024440
Insulated flat roof base TAHA-TAVA 355	11024442
Insulated flat roof base TAHA-TAVA 450	11024443
Insulated flat roof base TAHA-TAVA 560	11024444
INSULATED BASE 355 SILENCER INCLINED ROOF	11024257
Insulated flat roof base with sound attenuator TAHA-TAVA 560	11024450
EC motor 0-10V 20K potentiometer for TAHA-TAVA micro-watt	11024468

### General data

References	Type of motor
11024132	EC

### Dimensional data

References	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	Weight (kg)
11024132	521	1165	931	300	750	4 x Ø11	Ø605 M8x15	51

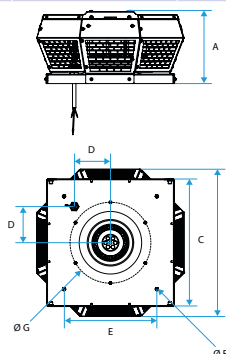

Taha

### Airflow data


References	Airflow (m <sup>3</sup> /h)
11024132	12000

### Electrical datas

References	Protection rating	Max. current consumption THREE-PHASE 400 V (A)	Max. power	Max. power
11024132	IP54	3.6	2,334	2334

# 11024132 TAHA® MICRO-WATT T 560

## Curve

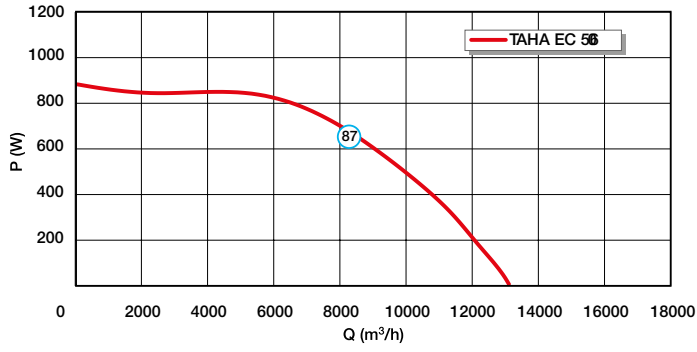

Taha-MW-560