

**Anti-vibration studs****11024135**  
**TAVA® 220 M MICRO-WATT**

The roof fan range that makes ventilation easier.

**PRODUCT BENEFITS**

- airflow from 600 to 14,000 m<sup>3</sup>/h,
- optional constant pressure controller kit,
- refined design,
- wide range of installation accessories,
- ErP-compliant with speed controller or controller kit.

**REGULATIONS AND COMPLIANCES**

Technical Opinion no.: 14.5/16-2185\_V2

**Principles of operation**

Low-consumption roof exhaust fan with vertical discharge for CMEV in multi-occupancy housing and non-residential buildings.

**Product description**

Aluminium housing for good corrosion resistance, EC motor for low energy consumption, vertical discharge.

**Fields of application**

Multi-occupancy residential housing, New, Refurbishment, Non-residential buildings

**Installation**

- horizontal outlet,
- flat or sloping roof with masonry base or accessory.

**Reference arguments**

Application:

- Low consumption roof exhaust fan for flat or sloping roof, vertical jet, 900 m<sup>3</sup>/h
- Designed for multi-occupancy residential or non-residential CMEV

Description:

- Aluminium unit for good corrosion resistance
- Anti-bird screen
- Backward curve centrifuge impeller
- Temperature control built into motor
- Asynchronous EC motor single-phase IP54
- Optional constant pressure controller kit with 2 possible values (day/night)
- Direct control possible via 0-10V using speed controller
- Lockable proximity switch as standard

## Anti-vibration studs

# 11024135

## TAVA® 220 M MICRO-WATT

### Main characteristics

- 10 sizes available from 600 to 14,000 m<sup>3</sup>/h
- aluminium AlMg3, weather resistant, low height. The motor unit tilts to make installation (optional accessories) and maintenance easier,
- the air outlet is protected by a screen to prevent intrusions, birds and other foreign objects,
- centrifugal backward curve impeller, balanced on the motor as per quality class G 6.3 DIN / ISO 1940,
- maintenance-free drive motor mounted on ball bearings with lifelong lubrication,
- motor protection by thermal contact built into winding,
- lockable proximity switch as standard,
- EC low-consumption motor,
- single-phase or 3-phase power supply depending on size,
- direct control possible via 0-10V,
- optional constant pressure controller kit with 2 possible values (day/night).

### Accessories


Description	Variants
Backdraft damper Ø 180	11024462
Pressure sensor + tube kit (2 m tube)	11024466
Constant pressure control kit	11024467
Connection flange D180	11024452
Flexible sleeve 180	11024457
Insulated flat roof base with sound attenuator TAHA-TAVA 220	11024446
EC motor 0-10V 20K potentiometer for TAHA-TAVA micro-watt	11024468

### General data

Variants	Type of motor
11024135	EC

### Dimensional data

Variants	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	Weight (kg)
11024135	190	388	337	95	245	4 x Ø9	Ø213 6xM6	5,1

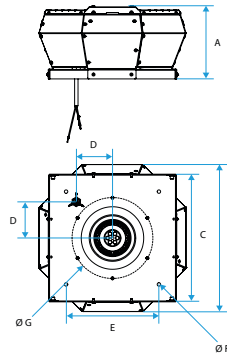

### Airflow data

Variants	Airflow (m <sup>3</sup> /h)
11024135	750

### Electrical datas

Variants	Max. power	Max. power	Protection rating	Max. current consumption SINGLE-PHASE 230 V (A)	Maximum current (A)	Power supply
11024135	0,113	113	IP54	0,9	0,9	Single-phase

Anti-vibration studs

## 11024135

### TAVA® 220 M MICRO-WATT

#### Curve

