

# 11024116

## TAVA® 250 M4

The roof fan range that makes ventilation easier.



Tava

### PRODUCT BENEFITS

- airflow from 500 to 3500 m<sup>3</sup>/h,
- refined design,
- wide range of installation accessories,
- ErP-compliant with speed controller.

### REGLEMENTATIONS AND COMPLIANCES

Technical Opinion no.: 14.5/16-2185\_V2

### Principles of operation

Roof exhaust fan with vertical discharge for CMEV in multi-occupancy housing and non-residential buildings.

### Product description

Aluminium housing for good corrosion resistance, vertical discharge.

### Fields of application

Multi-occupancy residential housing, New, Refurbishment, Non-residential buildings

### Installation

- horizontal outlet,
- flat or sloping roof with masonry base or accessory.

### Reference arguments

Application:

- Roof exhaust fan for flat or sloping roof, vertical jet, 600 m<sup>3</sup>/h
- Designed for multi-occupancy residential or non-residential CMEV

Description:

- Aluminium unit for good corrosion resistance
- Anti-bird screen
- Backward curve centrifuge impeller
- Asynchronous motor single-phase IP54 - 4 poles

### Main characteristics

- 7 sizes available from 500 to 3,500 m<sup>3</sup>/h (for sub-3500 m<sup>3</sup>/h flow rates, see TAVA® Micro-Watt),
- made of weatherproof AlMg3 aluminium with a very low height. The motor unit tilts for easy installation (optional accessories) and maintenance,
- the air outlet features a protective screen against intrusion, birds, and other foreign objects,
- backward curve centrifuge impeller balanced on the motor according to quality class G 6.3 of DIN / ISO 1940,
- the drive motor is designed for maintenance-free operation, thanks to its ball bearings with lifetime lubrication,
- the motor is protected by a thermal switch integrated in the winding,
- single-phase power supply.

### Accessories

Désignations	References
Backdraft damper Ø 180	11024462
Proximity switch 1-speed 1-Ph - 0.9 kW	11056196
Connection flange D180	11024452
INSULATED STACK BASE 220 INCLINED ROOF	11024250
Flexible sleeve 180	11024457
Insulated flat roof base TAHA-TAVA 220	11024440
Insulated flat roof base with sound attenuator TAHA-TAVA 220	11024446


# 11024116 TAVA® 250 M4

## General data

References	Type of motor
11024116	AC

## Dimensional data

References	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	Weight (kg)
11024116	190	541	337	95	245	4 x Ø9	Ø286 M6x15 (6x)	5,6

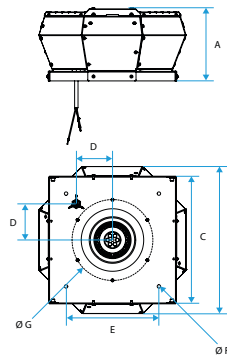

Tava


## Airflow data

References	Airflow (m³/h)
11024116	350

## Electrical datas

References	Protection rating	Max. current consumption SINGLE-PHASE 230 V (A)	Maximum current (A)	Power supply	Number of poles	Max. power
11024116	IP54	0,3	0,3	Single-phase	4	0,052

## Curve

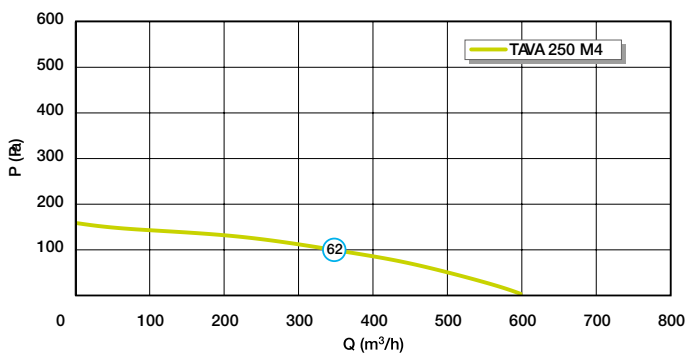

Tava-250