

11024123

TAVA® 560 T4

The roof fan range that makes ventilation easier.



Tava

PRODUCT BENEFITS

- airflow from 500 to 3500 m³/h,
- refined design,
- wide range of installation accessories,
- ErP-compliant with speed controller.

REGLEMENTATIONS AND COMPLIANCES

Technical Opinion no.: 14.5/16-2185_V2

Principles of operation

Roof exhaust fan with vertical discharge for CMEV in multi-occupancy housing and non-residential buildings.

Product description

Aluminium housing for good corrosion resistance, vertical discharge.

Fields of application

Multi-occupancy residential housing, New, Refurbishment, Non-residential buildings

Installation

- horizontal outlet,
- flat or sloping roof with masonry base or accessory.

Reference arguments

Application:

- Roof exhaust fan for flat or sloping roof, vertical jet, 11000 m³/h
- Designed for multi-occupancy residential or non-residential CMEV

Description:

- Aluminium unit for good corrosion resistance
- Anti-bird screen
- Backward curve centrifuge impeller
- Asynchronous motor 3-phase IP54 - 4 poles

11024123

TAVA® 560 T4

Main characteristics

- 7 sizes available from 500 to 3,500 m³/h (for sub-3500 m³/h flow rates, see TAVA® Micro-Watt),
- made of weatherproof AlMg3 aluminium with a very low height. The motor unit tilts for easy installation (optional accessories) and maintenance,
- the air outlet features a protective screen against intrusion, birds, and other foreign objects,
- backward curve centrifuge impeller balanced on the motor according to quality class G 6.3 of DIN / ISO 1940,
- the drive motor is designed for maintenance-free operation, thanks to its ball bearings with lifetime lubrication,
- the motor is protected by a thermal switch integrated in the winding,
- single-phase power supply.

Accessories


Désignations	References
Backdraft damper Ø 560	11024465
Flexible sleeve 560	11024460
Connection flange D560	11024455
Insulated flat roof base TAHA-TAVA 280	11024441
INSULATED STACK BASE 560 INCLINED ROOF	11024254
Insulated flat roof base TAHA-TAVA 220	11024440
Insulated flat roof base TAHA-TAVA 355	11024442
Insulated flat roof base TAHA-TAVA 450	11024443
Insulated flat roof base TAHA-TAVA 560	11024444
INSULATED BASE 355 SILENCER INCLINED ROOF	11024257
Insulated flat roof base with sound attenuator TAHA-TAVA 560	11024450

General data

References	Type of motor
11024123	AC

Dimensional data

References	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	Weight (kg)
11024123	521	1165	931	300	750	4 x Ø11	Ø605 M8x15	53,5

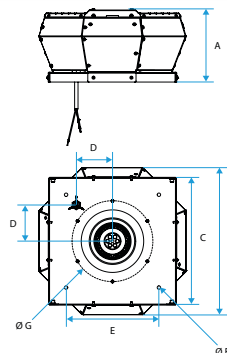

Tava

Airflow data


References	Airflow (m ³ /h)
11024123	9800

Electrical datas

References	Protection rating	Max. current consumption THREE-PHASE 400 V (A)	Maximum current (A)	Number of poles	Max. power
11024123	IP54	4,8	4,8	4	1,911

11024123 TAVA® 560 T4

Curve

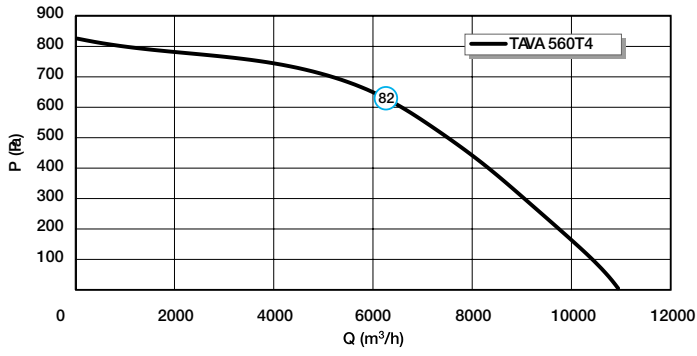

Tava-560