#### Connector



The TE 90° T-piece is used to connect two ductwork branches at an angle of 90°.



Té Equerre 90°

## **Product description**

The TE 90° T-piece is used to connect two ductwork branches at an angle of 90°. It ensures leak-free installation without excessive pressure losses on the branch connection.

### **Fields of application**

Multi-occupancy residential housing, New, Refurbishment, Non-residential buildings

#### Installation

- easy assembly of interlocking accessories: ducts are female, accessories are male,
- Final seal requires sealant and/or perforated strip,
- attached to duct using self-tapping screws (4 to 6 depending on diameter).

### **Reference arguments**

Application:

• Connects two ducting branches at an angle of 90° on non-residential and multi-occupancy residential systems


### Description:

• TE T-piece galvanised steel diameter 450/200 mm

### **Main characteristics**

- available in diameters from 80 to 900,
- galvanised steel as per EN 10346 ensuring uniformity of coating,
- M0 fire certification.

# **Dimensional data**

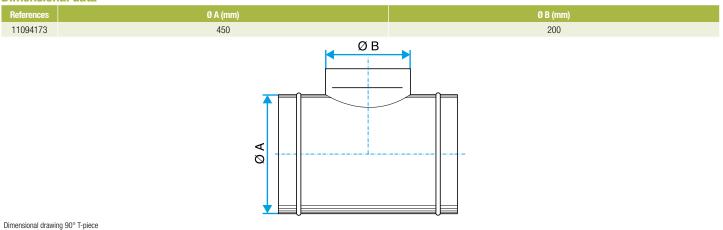



# Connector 11094173 TE GALVA T-PIECE - D450/200

Regulatory data

References 11094173

Fire protection rating M0