



The TE 90° T-piece is used to connect two ductwork branches at an angle of 90°.



Té Equerre 90°

### **Product description**

The TE 90° T-piece is used to connect two ductwork branches at an angle of 90°. It ensures leak-free installation without excessive pressure losses on the branch connection.

#### **Fields of application**

Multi-occupancy residential housing, New, Refurbishment, Non-residential buildings

#### Installation

- easy assembly of interlocking accessories: ducts are female, accessories are male,
- Final seal requires sealant and/or perforated strip,
- attached to duct using self-tapping screws (4 to 6 depending on diameter).

#### **Reference arguments**

Application:

• Connects two ducting branches at an angle of 90° on non-residential and multi-occupancy residential systems


#### Description:

• TE T-piece galvanised steel diameter 450/250 mm

#### **Main characteristics**

- available in diameters from 80 to 900,
- galvanised steel as per EN 10346 ensuring uniformity of coating,
- M0 fire certification.

## **Dimensional data**

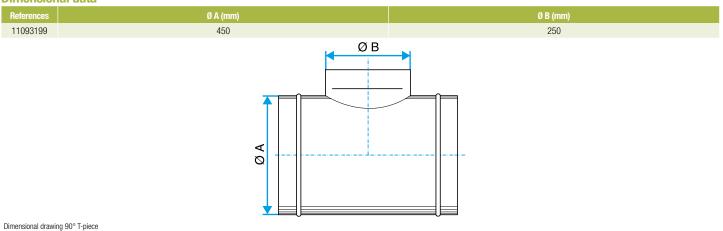

# Connector 11093199 TE GALVA T-PIECE - D450/250

Regulatory data

References 11093199

Fire protection rating M0