

11023042

TEMPERATION C CROSS-PIECE (CXO D160F/D125M)

Motorless heat recovery system in multi-occupancy housing



Static heat exchanger for multi-occupancy residential

PRODUCT BENEFITS

- energy savings: high-efficiency exchanger,
- individual heat exchanger: each dwelling recovers its own calories.

REGLEMENTATIONS AND COMPLIANCES

Technical Opinion no.: France

Principles of operation

In multi-occupancy residential housing, enables pre-heating and filtration of air for each dwelling using EasyVEC® fan units for air supply and exhaust.

Product description

In multi-occupancy residential housing, enables pre-heating and filtration of air for each dwelling using EasyVEC® fan units for air supply and exhaust.

Fields of application


Multi-occupancy residential housing, New, Refurbishment

Installation


- horizontal suspension on ceiling::
 - in suspended ceiling of equipment room,
 - attachment using \varnothing 8 mm threaded rod.
- horizontal on floor with separate attachment kit for each exchanger and each motor,
- vertical on wall:
 - in cupboard or equipment room,
 - attached using feet or floor attachment kit,
 - use horizontal mounting kit.

Main characteristics

- material:
 - expanded polypropylene unit,
- 4 x \varnothing 160 mm connections,
- coarse filter 65% on exhaust and fresh air filter on air supply unit,
- high-efficiency counter-current exchanger (85% efficiency at 120 m³/h)
- bypass version with extension and over-ventilation.

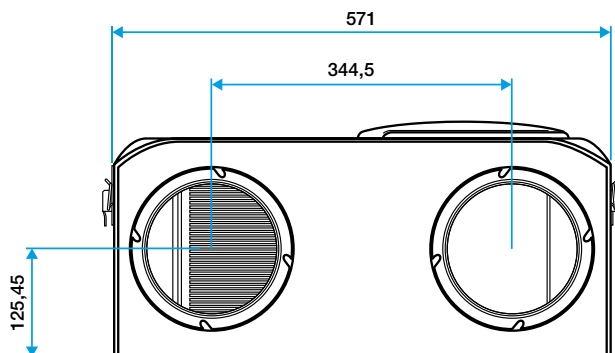

Echangeur vue piquages

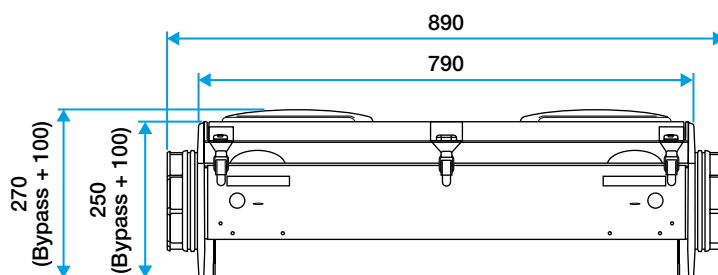

Echangeur vue longueur