#### Connector

# 11093243 TO GALVA ANGLE T-PIECE D400/355

The TE 45° T-piece is used to connect two ductwork branches at an angle of 45°.



Té Oblique 45°

#### **Product description**

The TE 45° T-piece is used to connect two ductwork branches at an angle of 45°. Use a TO instead of a TE for an air supply duct. It ensures leak-free installation without excessive pressure losses on the branch connection.

#### **Fields of application**

Multi-occupancy residential housing, New, Refurbishment, Non-residential buildings

#### Installation

- easy assembly of interlocking accessories: ducts are female, accessories are male,
- Final seal requires sealant and/or perforated strip,
- attached to duct using self-tapping screws (4 to 6 depending on diameter).

## **Reference arguments**

#### Application:

- Connects two ducting branches at an angle of 45° on non-residential and multi-occupancy residential systems
- Especially efficient for air supply compared to a 90° T-piece


### Description:

• Angled T-piece galvanised steel diameter 400/355 mm

# **Main characteristics**

- available in diameters from 80 to 900,
- galvanised steel as per EN 10346 ensuring uniformity of coating,
- M0 fire certification.

## **Dimensional data**

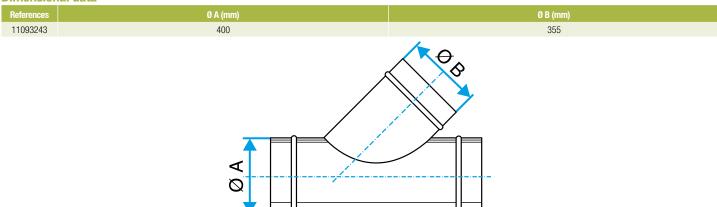

Dimensional drawing 45° Branch piece





**Connector** 

# 11093243 TO GALVA ANGLE T-PIECE D400/355

# **Regulatory data**

References	Fire protection rating
11093243	M0



