

Air handling unit

11050328
VEX530 Pre-coated

VEX500 is the air handling unit solution that delivers very good indoor air quality (ePM1 filter 90%) and a high level of comfort while limiting energy losses to a minimum.



VEX500

PRODUCT BENEFITS

- air handling units producing very high efficiency (up to 95%),
- exclusive Aldes Smart Control® system,
- optimal air quality and thermal comfort,

REGLEMENTATIONS AND COMPLIANCES

Eurovent Certification no. : 13.03.001

Principles of operation

VEX500 brings fresh, filtered air (up to 90% of PM1) into the building and recovers heat from exhaust air using its very high-efficiency heat exchanger. The incoming air can be heated and/or cooled using a full range of coils.

Product description

VEX400 is the ideal high-performance solution for small non-residential buildings. Thanks to its very high-performance heat exchanger, its wide range of filters and coils, building occupants enjoy very good indoor air quality (up to ePM1 90%) alongside excellent thermal and acoustic comfort. VEX400 also severely restricts energy losses to a minimum (up to 95% efficiency on Eurovent AAHE-certified heat exchanger).

Fields of application

New, Refurbishment, Non-residential buildings

Installation

- equipment rooms / flat roofs,
- indoors /outdoors,
- in-line duct connections,
- rectangular connectors (circular adapters available as accessories),
- choice of utility connections side - left or right.

Reference arguments

- VEX530 monobloc air handling unit with horizontal connection.
- High-efficiency counterflow plate heat exchanger (AAHE-certified).
- EC motors and backward curve impellers.
- 50 mm double-skin insulation.
- Filtration up to ePM1 90%.
- 100% adjustable bypass.
- Pre-coated finish and anthracite grey access panel.
- Multiple possibilities for built-in coils.
- Aldes Smart Control system.
- Built-in web server.
- BMS via Modbus RTU and Bacnet TCP/IP.

Air handling unit

11050328
VEX530 Pre-coated

Main characteristics

- pre-wired monobloc unit featuring self-supporting construction with dual-wall panels,
- 50 mm mineral wool insulation, density 40 kg/m³,
- high-efficiency counterflow plate heat exchanger up to 95% (AAHU-certified),
- EC motor and high-performance backward curve impeller,
- 100 % and adjustable bypass control,
- G4 filters (Coarse 60%) on exhaust and F7 (ePM1 60%) on fresh air as standard,
- optional: M5 (ePM10 50%), F9 (ePM1 90%),
- wide range of coils,
- built-in switch,
- Aldes Smart Control® system:
 - constant speed,
 - constant airflow,
 - constant pressure,
 - variable airflow according to CO₂/VOC sensor (0-10 V signal),
 - pressure control: adapts pressure to airflow measured, for very high energy efficiency,
 - built-in clock: timer control.
- configuration & monitoring via:
 - remote touch-screen control,
 - built-in webserver,
 - BMS via ModbusRTU, Bacnet, TCP/IP.
- de-icing by electrical coil on exhaust air or by controlled bypass opening

Supplementary characteristics

- coil options:
 - electrical,
 - electrical post-heating,
 - hot water with or without 3-way valve,
 - cold water with or without 3-way valve,
 - reversible (hot/cold) water with or without 3-way valve.
- aluminium or galvanised steel + paint condensate collection tray on heat exchanger,
- monobloc roof piece fitted in factory for outdoor versions,
- access to all components on the main panel via hinged, removable doors, and to control system via a specific central hatch,
- steel access doors pre-coated in dark grey (RAL 7016),
- galvanised steel or pre-coated external finish (RAL 9006) depending on the version,
- M0 interior finishes made of Z275 galvanised steel.

Accessories

Désignations	References
Sens CO ₂ sensor	11017090
VEX530 rain hood	11069034
Flexible sleeve rectangular/circular D355 VEX430/530	11069050
Rigid adapter piece VEX530	11069042
Motorised shut-off damper VEX430, VEX530 and VEX640	11069018
Ambient temp° transmitter	11069100
Motor Sfa-S2 On/Off 24/230V	11055045
Standalone detector trip device 230/24V	11906103
Smoke sensor	11058417
Flexible sleeve MS Pro rectangular 710x310 mm VEX430 VEX530	11069090

Consumables

Désignations	References
F7 flat filter VEX430/630an 640ae 530	11069058
G4 flat filter kit VEX630an 640ae 430/530	11069066
F7 HE flat filter kit VEX530 AN	11069074
G4 flat pre-filter kit VEX530	11069082
M5 pre-filter kit Fresh Air (AN) / Extract air (AE) for VEX430	11100554
F9 flat filter kit VEX530/VEX630	11100740

Air handling unit

11050328 VEX530 Pre-coated

Options

base
C69385
C02
DEBCON
E69393
EXTENSION
EXTER
F69385
F7
F7+F9
FILAIRE
G4+F9
G4_S
G69374
HAUTEFF
L69374
M5+F7
M5+F7HE
M5+F9
M5_R
M5_S
PRECON
PREDEBCON
PREFILTRE
PREFILTRE2
PRESS
S69374
S69385
S69393
TACTILE
ZAS024

Associated services


Commissioning

General data

References	Insulation density (kg/m ³)	Thickness of insulation (mm)	Available filters	Connection direction	Type of exchanger	Type of motor	Type of impeller
11050328	40	50	Coarse 65%, ePM10 50%, ePM1 60%, ePM1 90%	Horizontal	With plates	EC	Backward curve

Dimensional data

References	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	Weight (kg)
11050328	1823	937	907	710	310	740	340	1161	291

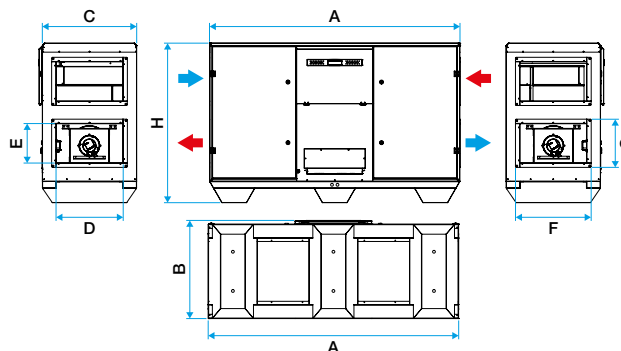

Dimensions VEX500

Dimensions are given as a guide only. Make your selection in the Selector VEX software to obtain the actual characteristics of your unit.

Air handling unit

11050328 VEX530 Pre-coated

Airflow data

References	Max. airflow (m³/h)
11050328	1650

Thermal data

References	Max. exchanger output (%)	Max. current absorbed (kW)
11050328	95	1,011

Electrical datas

References	Max. power of electrical coil 1 (kW)	Max. electrical output of unit (kW)	Electrical coil voltage 1	Unit voltage (V)
11050328	5.61	0,98	3x400	230

Regulatory data

References	Test values as per standard EN 1886
11050328	D1, L2, F7, T3, TB2


Principe de fonctionnement



View of airflows in a VEX500

Eclaté VEX500

Curve

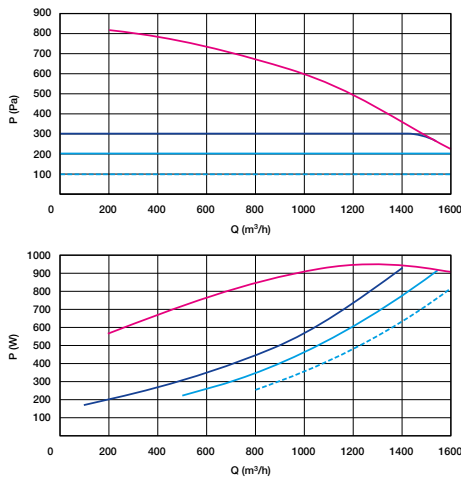

- > Aeraulic curves drawn up as per standard NF EN ISO 5801.
- > P (Pa) = static pressure.
- > P (W) = power consumption.

Airflow and power VEX530