

## Air handling unit

11050322  
VEX630 Pre-coated

VEX600 is the air handling unit solution with a small footprint. It delivers a very good indoor air quality, a high level of comfort and restricts energy losses to a minimum.



VEX600

## PRODUCT BENEFITS

- air handling units producing very high efficiency (up to 95%),
- optimal air quality and thermal comfort,
- excellent acoustic performance,

## REGLEMENTATIONS AND COMPLIANCES

Eurovent Certification no. : 13.03.001

## Principles of operation

VEX600 brings fresh, filtered air (up to 90% of PM1) into the building and recovers heat from exhaust air using its very high-efficiency heat exchanger. The incoming air can be heated and/or cooled using a full range of coils.

## Product description

VEX600 is the ideal high-performance solution for non-residential buildings where floor space is at a premium. Thanks to its very high-performance heat exchanger, its wide range of filters and coils, building occupants enjoy very good indoor air quality (up to ePM1 90%) alongside excellent thermal and acoustic comfort. VEX600 also severely restricts energy losses to a minimum (up to 95% efficiency on Eurovent AAHE-certified heat exchanger).

## Fields of application

New, Refurbishment, Non-residential buildings

## Installation

- equipment rooms/ cabinets,
- indoors,
- vertical duct connections,
- rectangular connectors (circular adapters available as accessories).

## Reference arguments

- VEX630 monobloc air handling unit with vertical connection.
- High-efficiency counterflow plate heat exchanger (AAHE-certified).
- EC motors and backward curve impellers.
- 1600 m<sup>3</sup>/h.
- 50 mm double-skin insulation.
- Filtration up to ePM1 90%.
- 100% adjustable bypass.
- Pre-painted finish and anthracite grey access panel.
- Multiple possibilities for built-in coils.
- Aldes Smart Control system.
- Built-in web server.
- BMS via Modbus RTU and Bacnet TCP/IP.

### Air handling unit

# 11050322

## VEX630 Pre-coated

### Main characteristics

- pre-wired monobloc unit featuring self-supporting construction with dual-wall panels,
- duct connections on top of unit,
- 50 mm mineral wool insulation, density 40 kg/m<sup>3</sup>,
- high-efficiency counterflow heat exchanger up to 95% (AAHE-certified),
- EC motor and high-performance backward curve impeller,
- 100 % and adjustable bypass control,
- G4 filter (Coarse 60%) on exhaust, F7 (ePM1 60%) on fresh air,
- optional: M5 (ePM10 50%), F9 (ePM1 90%),
- optional coils,
- built-in switch,
- Aldes Smart control system:
  - constant speed,
  - constant airflow,
  - constant pressure,
  - variable airflow according to CO2/VOC probe (0-10V signal)
  - pressure control: adapts pressure to airflow measured, for very high energy efficiency,
  - built-in clock: timer control.
- configuration & monitoring via:
  - remote touch-screen control,
  - built-in webserver,
  - BMS via ModbusRTU, Bacnet, TCP/IP.
- de-icing by electrical coil on exhaust air or by controlled bypass opening

## Air handling unit

11050322  
VEX630 Pre-coated

## Supplementary characteristics

- coil options:
  - electrical,
  - electrical post-heating,
  - hot water with or without 3-way valve,
  - cold water with or without 3-way valve,
  - reversible (hot/cold) water with or without 3-way valve.
- aluminium or galvanised steel + paint condensate collection tray,
- access to all components on the main panel via hinged, removable doors, and to control system via a specific central hatch,
- steel access doors pre-coated in dark grey (RAL 7016),
- galvanised steel or pre-coated external finish (RAL 9006) depending on the version,
- M0 interior finishes made of Z275 galvanised steel.

## Accessories

Désignations	References
Sens CO2 sensor	11017090
MS Pro rect/circ. insul. VEX630	11068347
Flexible sleeve MS Pro rectangular/circular VEX630 D350	11068415
Rigid adapter piece VEX630	11068385
MOTOR SHUT-OFF DAMPER VEX630	11068450
Ambient temp° transmitter	11069100
Motor Sfa-S2 On/Off 24/230V	11055045
Standalone detector trip device 230/24V	11906103
Smoke sensor	11058417

## Consumables

Désignations	References
F7 flat filter VEX430/630an 640ae 530	11069058
F7 HE filter kit VEX630 AN	11100427
F7 flat filter kit VEX630 AE	11100433
G4 FILTER KIT VEX630 AE	11100435
M5 pre-filter kit Fresh Air (AN) / Extract air (AE) for VEX430	11100554
M5 flat filter kit VEX630 AE	11100737
F9 flat filter kit VEX530/VEX630	11100740
G4 flat filter kit VEX630an 640ae 430/530	11069066

## Options

base
F7+F9
G4+F9
M5+F7
M5+F9
M5_R
M5_S
C78958
CO2
DEBCON
E68411
E78657
F7
F78958
FILAIRE
G4_S
G68419
HAUTEFF
L68419
M5+F7HE
PRECON

Air handling unit

## 11050322 VEX630 Pre-coated

### Options

PREDEBCON
PREFILTRE
PREFILTRE2
PRESS
S68411
S68419
S78657
S78958
TACTILE

### Associated services


Commissioning

### General data

References	Insulation density (kg/m <sup>3</sup> )	Thickness of insulation (mm)	Available filters	Connection direction	Type of exchanger	Type of motor	Type of impeller
11050322	40	50	Coarse 65%, ePM10 50%, ePM1 60%, ePM1 90%	Vertical	With plates	EC	Backward curve

### Dimensional data

References	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	Weight (kg)	Connection h (mm)	Connection l (mm)
11050322	1499	1500	909	765	240	190	240	765

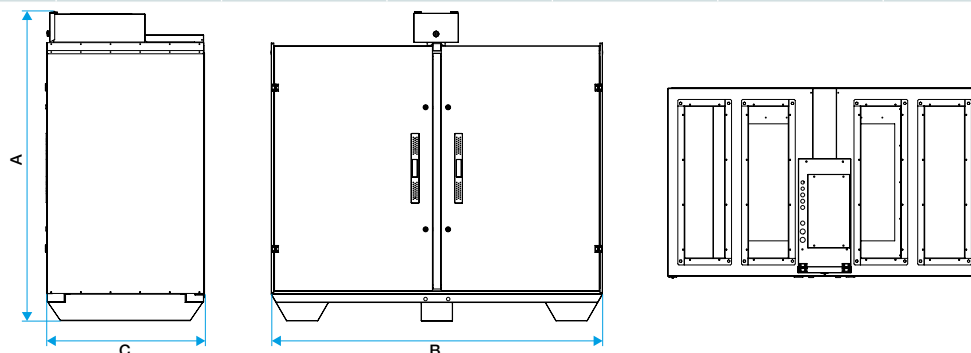

Dimensions VEX600

Dimensions are given as a guide only. Make your selection in the Selector VEX software to obtain the actual, detailed characteristics of your unit.

### Airflow data

References	Max. airflow (m <sup>3</sup> /h)
11050322	1650

### Thermal data

References	Max. exchanger output (%)	Max. current absorbed (kW)
11050322	95	1,05

### Electrical datas

References	Max. power of electrical coil 1 (kW)	Max. electrical output of unit (kW)	Electrical coil voltage 1	Unit voltage (V)
11050322	5.65	0,98	3x400	230

### Regulatory data


References	Test values as per standard EN 1886
11050322	D1, L2, F7, T3, TB2

Air handling unit

## 11050322

### VEX630 Pre-coated


#### Curve

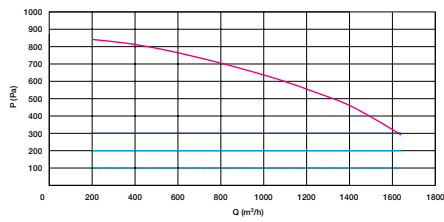

> Aeraulic curves drawn up as per standard NF EN ISO 5801.

> P (Pa) = static pressure.

> P (W) = power consumption.

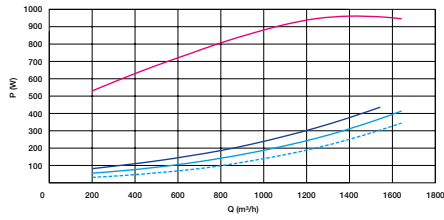

Airflow and power VEX630