


## Wall grille

# 11050012

## SC125 F3 300X150

The SC 125 slotted grille offers discreet aesthetics for air extraction in ventilation or air-conditioning systems.



Grille SC 125

### PRODUCT BENEFITS

- aesthetic,
- easy to install / remove.

### Principles of operation

The SC 125 wall grille is made of slotted metal sheet with 45% of free air passage, to enable air extraction. It uses F3 clips for easy installation/removal in ME/MT plenums and has an F4 mounting frame.

### Product description

The SC 125 wall grille delivers air extraction in ventilation or air-conditioning systems. Its construction in slotted sheet metal with 45% of free air passage and its white epoxy coating enable discreet installation on walls. Furthermore, its F3 clips as standard make it easy to install and remove in plenums or mounting frames.

### Fields of application

New, Refurbishment, Non-residential buildings

### Installation

- for installation on wall,
- grille supplied with F3 clips for easy installation / removal in ME/MT plenums or in the F4 mounting frame.

### Main characteristics

- slotted wall-mounted grille with 45% free air passage,
- steel with epoxy paint finish, RAL 9003 white 30%,
- concealed F3 attachment using friction clips.
- dimensions from 75 x 75 to 1,200 x 600 mm with increments of 25 mm in length.

### Accessories

Désignations	References
Adapter F4 300X150	11053767
PLEN. ME F3 300X150/D160 PC	11053671
MTF3 300X150/D160 PLENUM PA	11053641
MTF3 PLENUM PA	11053703
RECT DAMPER SGS 300X150	11053247
ME Plenum F3 300x150/D160 PC cfg	11053604
MT Plenum F3 300X150/D160 PA cfg	11053448

### General data


References	Type of finish	Colour
11050012	Epoxy paint	Lagoon blue

Wall grille


11050012  
SC125 F3 300X150

Dimensional data

References	H (mm)	L (mm)	Ø plenum (mm)
11050012	150	300	160

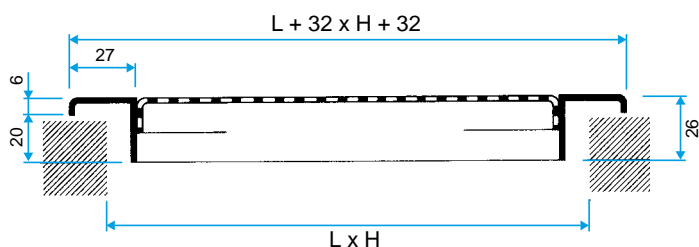

Grille SC 125 seule

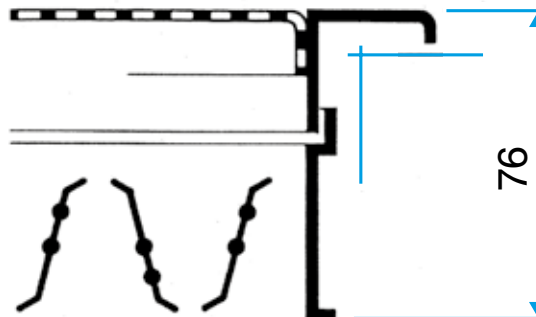

Grille SC 125 avec registre AGB ou SGS monté

Airflow data

References	Comfort airflow for $L_w < NR 25$ ( $m^3/h$ )
11050012	350