

Wall grille

11050583

AC 102D F3 300x150

The AC 102 D wall grille enables air supply on all ventilation and air-conditioning systems.



AC 102D F3 300x150

PRODUCT BENEFITS

- adjustable vanes,
- aesthetic,
- easy to install / remove.

Principles of operation

The AC 102 D dual-deflection has individually dirigible horizontal and vertical vanes to adjust the air supply level in a room.

Product description

The AC 102 D is a steel dual deflection wall-mounted grille with individually adjustable, movable horizontal rear and vertical front vanes.

Fields of application

New, Refurbishment, Non-residential buildings

Installation

- wall installation,
- concealed F3 attachment using friction clips.

Reference arguments

- AC 102 D anodised aluminium double-deflection indoor wall grille (supply air)
- Concealed F3 attachment using friction clips
- 300x150 mm
- Horizontal fins at the rear and vertical fins at the front, individually adjustable, 20 mm pitch
- Accessories: SGS damper (galvanised steel) or AGB damper (rough aluminium) counter-rotational motion, F4 or F6 galvanised steel mounting frame, galvanised steel connection plenum with MT rear connection or ME side connection

Main characteristics

- anodised aluminium, natural satin colour,
- individually dirigible horizontal rear and vertical front vanes, 20 mm pitch.

Accessories

Désignations	References
Adapter F4 300X150	11053767
PLEN. ME F3 300X150/D160 PC	11053671
MTF3 300X150/D160 PLENUM PA	11053641
RECT DAMPER SGS 300X150	11053247
ME Plenum F3 300x150/D160 PC cfg	11053604
MT Plenum F3 300X150/D160 PA cfg	11053448

General data


References	Type of finish	Colour
11050583	Aluminium	Aluminium with mosquito mesh

Wall grille


11050583
AC 102D F3 300x150

Dimensional data

References	H (mm)	L (mm)
11050583	150	300

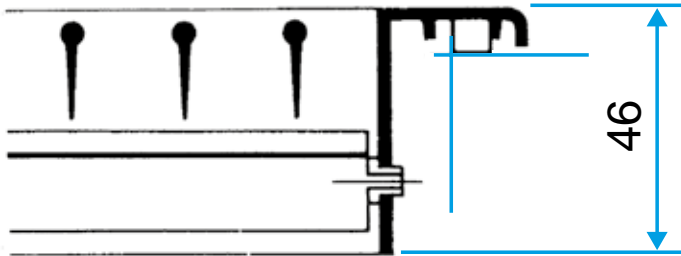

Grille AC 102 D seule

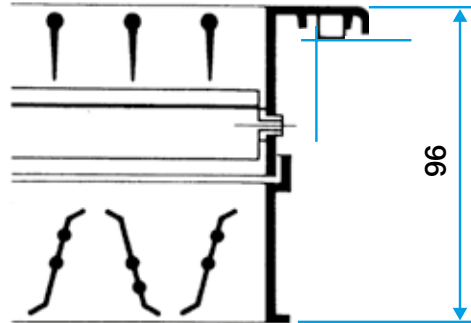

Grille AC 102 D avec registre AGB ou SGS monté

Airflow data

References	Comfort airflow for $L_w < NR 25$ (m ³ /h)
11050583	450