

Connector

11066329

CHO 90° BEND GALVA - 490x130

The oblong horizontal 90° bend is used to change the direction of an oblong ducting system by a 90° angle in the plane of the system.



90° bend oblong horizontal

PRODUCT BENEFITS

- small size for high airflow,
- good airtight performance and controlled pressure losses,
- easy to install and maintain (no inaccessible corners).

Product description

The oblong horizontal 90° bend is used to change the direction of an oblong ducting system by a 90° angle in the plane of the system.

Fields of application

Multi-occupancy residential housing, New, Refurbishment, Non-residential buildings

Installation

- easy assembly of interlocking accessories: ducts are female, accessories are male,
- Final seal requires sealant and/or perforated strip,
- attached to duct using self-tapping screws (4 to 6 depending on diameter).

Reference arguments

Application:

- Oblong accessories for installation of ventilation systems in confined spaces (suspended ceiling, horizontal side flues conveying high airflow, etc.)
- Oblong horizontal bend used to change the direction of oblong ducting by 90° in the same plane

Description:


- CHO 90° oblong horizontal bend galvanised steel
- Length 490 mm x height 130 mm

Main characteristics


- standard dimensions (20 oblong sections),
- galvanised steel as per EN 10346 ensuring uniformity of coating,
- MO fire certification.

Dimensional data

References	H (mm)	L (mm)
11066329	130	490

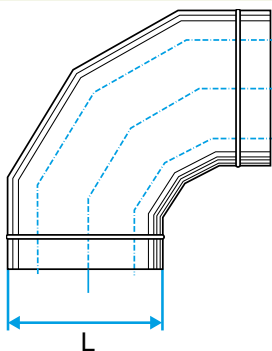

Dimensional drawing oblong horizontal 90° bend



Dimensional drawing oblong horizontal 90° bend

Connector

11066329

CHO 90° BEND GALVA - 490x130

Regulatory data

References	Fire protection rating
11066329	M0