

Small outlet**11098293****GALVA 30° sector bend+seal - Ø 560 mm**

The sealed 30° bend is used to change the direction of a galvanised ducting system by a 30° angle while delivering class C airtight performance.

**PRODUCT BENEFITS**

- easy and quick to install,
- class C airtight performance,
- aesthetic ducting.

Product description

The sealed 30° bend is used to change the direction of a galvanised ducting system by a 30° angle while delivering class C airtight performance. The bends are pressed up to diameter 200, from 250 to 500 they use sectors.

Fields of application

Multi-occupancy residential housing, New, Refurbishment, Non-residential buildings

Installation

- to slot in or remove an accessory, rotate it slightly in the duct,
- as an airtight seal is automatically provided by the ALDES seal, no need to use sealant or adhesive tape,
- for vertical installations especially, the use of self-tapping screws remains recommended,
- time savings in relation to ducting with standard accessories is in the range of 20 % (at least 15 to 30 seconds saved per junction for diameters 125 to 315, or at least 30 to 60 seconds saved for each accessory in these diameters),
- ALDES sealed accessories are specially designed to ensure easy connection / disconnection. The ALDES range offers class C airtight performance and low connection torque.

Reference arguments

Application:

- Adds a sealed 30° bend to ducting in non-residential or multi-occupancy residential systems

Description:

- 30° sealed bend galvanised diameter 560 mm

Main characteristics

- available in diameters from 125 to 560,
- galvanised steel as per EN 10346 ensuring uniformity of coating,
- temperature range: - 30°C à + 100°C,
- resistant to ageing (• 30 years), UV and ozone,
- MO fire certification,
- class C airtight performance as per standard NF EN 12237.

General data

Variants	Main material
11098293	Galvanised steel


Small outlet

11098293

GALVA 30° sector bend+seal - Ø 560 mm

Dimensional data

Variants	Ø (mm)	Ø A (mm)
11098293	560	560

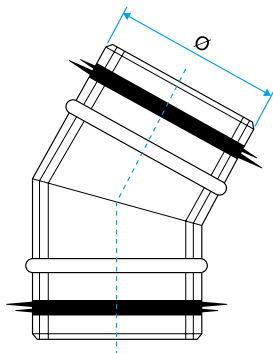

Regulatory data

Variants	Fire protection rating
11098293	M0