# **Airflow control**

# 11098552 RCE GALVA Branch piece+seal - Ø 200/160 mm

The sealed RCE concentric conical reducer is used to join two galvanised ducts of different diameters together while delivering class C airtight performance.



#### PRODUCT BENEFITS

- easy and quick to install,
- class C airtight performance,
- aesthetic ducting

#### **Product description**

The sealed RCE offset conical reducer is used to join two galvanised ducts of different diameters together in commercial or multi-occupancy residential systems, while delivering class C airtight performance. Furthermore, the offset conical reducer maintains a constant system height.

# **Fields of application**

Multi-occupancy residential housing, New, Refurbishment, Non-residential buildings

#### Installation

- to slot in or remove an accessory, rotate it slightly in the duct,
- as an airtight seal is automatically provided by the ALDES seal, no need to use sealant or adhesive tape,
- for vertical installations especially, the use of self-tapping screws remains recommended,
- time savings in relation to ducting with standard accessories is in the range of 20 % (at least 15 to 30 seconds saved per junction for diameters 125 to 315, or at least 30 to 60 seconds saved for each accessory in these diameters),
- ALDES sealed accessories are specially designed to ensure easy connection / disconnection. The ALDES range offers class C airtight performance and low connection torque.

### Reference arguments

## Application:

- Sealed connection between a 200 mm circular duct to offset 160 mm circular duct in a non-residential or multi-occupancy residential system
- The offset reducer maintains the ducting at the same height

#### Description:

Sealed offset conical reducer galvanised steel diameter 200/160 mm

#### **Main characteristics**

- available in diameters from 125 to 560,
- galvanised steel as per EN 10346 ensuring uniformity of coating,
- temperature range: 30°C à + 100°C,
- resistant to ageing (• 30 years), UV and ozone,
- M0 fire certification,
- class C airtight performance as per standard NF EN 12237.

#### **General data**

Variants	Main material
11098552	Galvanised steel






## **Airflow control**

# 11098552

RCE GALVA Branch piece+seal - Ø 200/160 mm

# **Dimensional data**

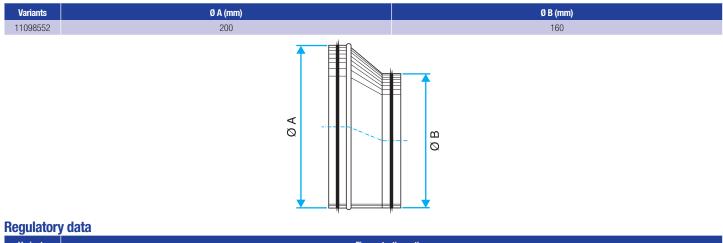

	3			
	Variants	Fire protection rating		
	11098552	MO		

