

Occasional exhaust fan**11098447**
RG GALVA +SEAL - D400

The RG sealed damper balances a circular ducting system, while ensuring a very low leak rate: class D (up to D315) or C (D355 and beyond).

**PRODUCT BENEFITS**

- class D airtight performance (up to 315 mm) as per EN 1751,

Principles of operation

The flap of the sealed RG is opened and closed by rotating a handle located on a jumper.

Product description

The RG sealed damper balances airflow in a circular ducting system. It features double-lip airtight seals on each junction to minimise leaks with the rest of the system. Its top jumper enables overlaid insulation without covering the handle.

Fields of application

Multi-occupancy residential housing, New, Refurbishment, Non-residential buildings

Installation

- installed in circular ducts.

Reference arguments

Application:

- Airtight airflow balancing across all branches of a non-residential or multi-occupancy residential ventilation system

Description:

- Sealed damper galvanised steel diameter 400 mm
- Manual control
- Screw-locked plastic handle, M1 class Lexan shafts

Main characteristics

- class D airtight performance (315 mm and below) and class C (355 mm and above) as per EN 1751,
- galvanised steel,
- metal handle,
- can be motorised upwards of diameter 355 mm using motor plate kit ordered separately.

Accessories

Description	Variants
MOTOR PLATE KIT FOR DIAMETERS 355 to 500 mm	11055122
CM MOTOR 24-L ON/OFF	11055040
TF MOTOR 230 ON/OFF	11055049
TF MOTOR 24 ON/OFF	11055050
CM MOTOR 230-L ON/OFF	11055038


Occasional exhaust fan

11098447

RG GALVA +SEAL - D400

Dimensional data


Variants	H (mm)	L (mm)	Ø (mm)	Weight (kg)
11098447	80	202	400	2,49

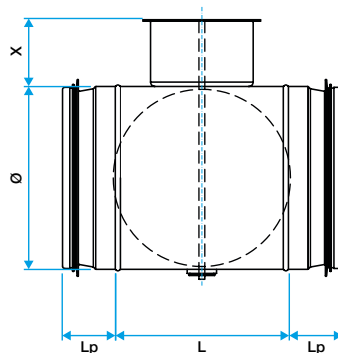

Regulatory data

Variants	Airtightness class
11098447	C

Installation

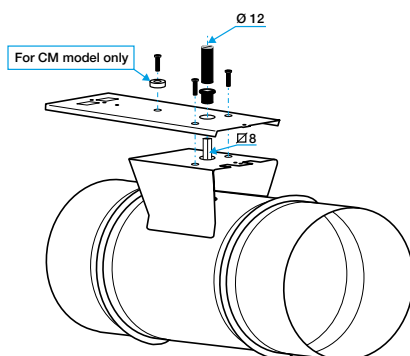

Installation de la platine de motorisation