

Connector

11064021

ROCTP GALVA - 895x415 - D500

The ROCTP oblong cylindrical tangent reducer is used to connect an oblong duct with a circular duct while maintaining a linear and flat ducting without losing space underneath.



Oblong Tangent Cylindrical Reducer on flat section:

PRODUCT BENEFITS

- small size for high airflow,
- good airtight performance and controlled pressure losses,
- easy to install and maintain (no inaccessible corners).

Product description

The ROCTP oblong cylindrical tangent reducer is used to connect an oblong duct with a circular duct while maintaining a linear and flat ducting without losing space underneath.

Fields of application

Multi-occupancy residential housing, New, Refurbishment, Non-residential buildings

Installation


- easy assembly of interlocking accessories: ducts are female, accessories are male,
- Final seal requires sealant and/or perforated strip,
- attached to duct using self-tapping screws (4 to 6 depending on diameter).

Main characteristics

- standard dimensions (20 oblong sections),
- galvanised steel as per EN 10346 ensuring uniformity of coating,
- M0 fire certification.

Dimensional data

References	H (mm)	L (mm)	Ø (mm)
11064021	415	895	500

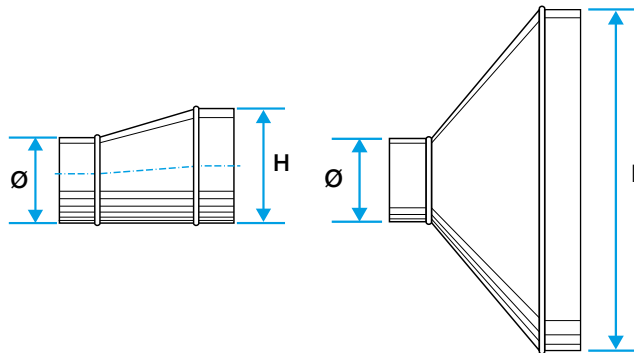

Dimensional drawing Oblong Tangent Cylindrical Reducer on flat section

Regulatory data

References	Fire protection rating
11064021	M0