

#### Connector



The ROTP oblong tangent reducer is used to connect oblong ducts of different diameters while maintaining a linear and flat ducting without losing space underneath.



Oblong Tangent Reducer on flat section:

# **PRODUCT BENEFITS**

small size for high airflow,
good airtight performance and controlled pressure losses,
easy to install and maintain (no inaccessible corners).

## **Product description**

The ROCTP oblong tangent reducer on flat section is used to connect two oblong ducts of different diameters while maintaining a linear and flat ducting without losing space underneath.

### **Fields of application**

Multi-occupancy residential housing, New, Refurbishment, Non-residential buildings

### Installation

- easy assembly of interlocking accessories: ducts are female, accessories are male,
- Final seal requires sealant and/or perforated strip,
- attached to duct using self-tapping screws (4 to 6 depending on diameter).

### **Reference arguments**

Application:

- Oblong accessories for installation of ventilation systems in confined spaces (suspended ceiling, horizontal side flues conveying high airflow, etc.)
- Tangential oblong-oblong reducer used to connect oblong ducting to oblong ducting of a different size while retaining a linear, flat system without losing space underneath
- If no reduction on height, use an RCO.

### Description:

- ROTP tangential oblong reducer on flat section, galvanised steel
- Length 475 mm x height 165 mm Length 325 mm x height 130 mm


### **Main characteristics**

- standard dimensions (20 oblong sections),
- galvanised steel as per EN 10346 ensuring uniformity of coating,
- M0 fire certification.

## Connector

# **11066402** ROTP GALVA - 475x165 / 325x130

#### **Dimensional data**

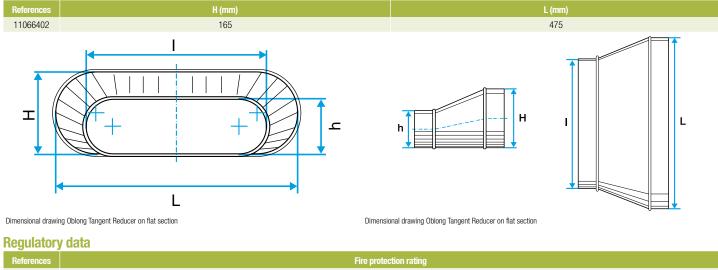

References	Fire protection rating
11066402	МО

