

**Ceiling diffuser****11051017**  
**SC 832 TP F0 D250 (AxB=600x600)**

The SC 832 TP is a steel concentric horizontal fixed air diffuser, designed to replace a standard ceiling tile.



SC 832 TP F0 D250 (AxB=600x600)

**PRODUCT BENEFITS**

- intended for 600x600 mm suspended ceiling tiles,
- easy to install.

**Principles of operation**

The SC 832 diffuser is installed in the place of a standard 600x600 mm suspended ceiling tile. It delivers a horizontal fixed airflow.

**Product description**

The SC 832 is a fixed concentric steel diffuser for air distribution in ventilation or air conditioning systems in commercial buildings. It is designed to be installed in place of a standard 600 x 600 mm ceiling tile. The diffuser is made of steel with an epoxy paint finish, RAL 9003 white 30% gloss.

**Fields of application**

New, Refurbishment, Non-residential buildings

**Installation**

The SC 832 TP diffuser is installed in the place of a standard 600x600 mm suspended ceiling tile.

**Reference arguments**

- Pressed steel circular cones, fixed position.
- Steel compensation plate replacing a ceiling panel.
- Concealed screw attachment to concrete slab in diffuser neck. Note: the weight of the diffuser must not be borne by the suspended ceiling framework. Use the suspension cables on page xxx.
- Direct connection to circular ducts or LRE plenum.
- Steel finish, epoxy paint RAL 9010 white.

**Main characteristics**

- SC 832 fixed concentric steel diffuser,
- steel ceiling compensation plate.
- steel with epoxy paint:
  - standard: white RAL 9003 30% gloss,
  - option: other RAL.
- attachment:
  - installed in place of a 600 x 600 mm ceiling tile.
  - circular duct connection directly on neck
- connection:
  - overall dimensions suited to T-bar ceiling 600 x 600 mm
  - using a plenum.

Ceiling diffuser

## 11051017 SC 832 TP F0 D250 (AxB=600x600)

**Supplementary characteristics**


- accessories:
  - BR butterfly type damper with 2 V-shape vanes,
  - LRE galvanised steel connection plenum.

**Accessories**

Désignations	References
PLENUM LRE842/883 F0 D250/250	11053313
BR CIRCULAR DAMPER D250	11053222
LRE Plenum diff circular F0 D250 PC cfg	11053348
LRE Plenum insul 5 sides diff circular F0 D250 PC cfg	11053368

**Dimensional data**

References	A x B* (mm)	E (mm)	F (mm)	P (mm)	Ø B (mm)	Ø D (mm)
11051017	600X600	90	50	360	294	250

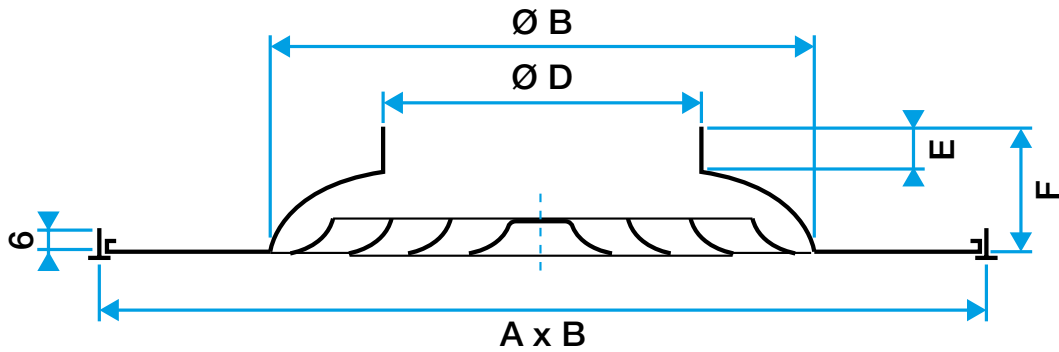

Diffuseur SC 832 TP

**Airflow data**

References	Comfort airflow < 35 dB(A) (m³/h)
11051017	600