

**Swirl jet diffuser****11051107****SR 861 F0 D200 (c20) RAL9010-85%**

The SR 861 is a fixed high-induction swirl jet diffuser for air diffusion in commercial buildings.



SR 861 F0 D200 (c20) RAL9010-85%

**PRODUCT BENEFITS**

- ideal for cooling,
- excellent mixing rate.

**Principles of operation**

The SR 861 diffuser can be installed in any type of ceiling. It offers fixed swirl jet diffusion ideal for air conditioning systems handling large temperature differences and low-ceiling rooms.

**Product description**

The SR 861 is a high-induction swirl jet diffuser for air diffusion in ventilation or air conditioning systems in commercial buildings. It offers a high mixing capacity for fast homogenisation of temperatures. It is ideal for air conditioning systems handling large temperature differences and low-ceiling rooms. It is made of steel with an epoxy coating RAL 9010 white 85% finish. Available in diameters from 125 to 315 mm.

**Fields of application**

Non-residential buildings

**Installation**

The SR 861 diffuser is installed in a suspended ceiling using a concealed screw attachment on the sides of the diffuser or on a plaster / BA13 ceiling using a visible attachment with the centre screw and a bridge. The system must be attached to the concrete slab using the tabs on the plenum.

**Reference arguments**

- Steel body and diffusion vanes.
- Steel finish, epoxy paint RAL 9010 white.
- Concealed attachment using a screw on the neck of the diffuser.

**Main characteristics**

- fixed swirl jet ceiling diffuser,
- high mixing capacity for fast homogenisation of temperatures,
- ideal for air conditioning systems with large temperature differences and low ceilings,
- steel body and vanes,
- circular diffuser with circular connection,
- epoxy coating RAL 9010 white 85%,
- attachment:
  - concealed screw attachment in diffuser neck,
  - visible central screw and bridge.

## Swirl jet diffuser

# 11051107

## SR 861 F0 D200 (c20) RAL9010-85%

### Supplementary characteristics


- accessories:
  - BR: butterfly type damper with 2 V-shaped vanes,
  - LRE connection plenum with side branch connection.
- optional flow splitter,
- available in standard version or insulated on 2/5 sides.

### Accessories

Désignations	References
PLENUM LRE842/883 F0 D200/200	11053312
BR CIRCULAR DAMPER D200	11053221
LRE Plenum diff circular F0 D200 PC cfg	11053347
LRE Plenum insul 5 sides diff circular F0 D200 PC cfg	11053367

### Dimensional data

References	P (mm)	Ø A (mm)	Ø B (mm)	Ø D (mm)	Ø plenum connection (mm)
11051107	200	300	270	200	200

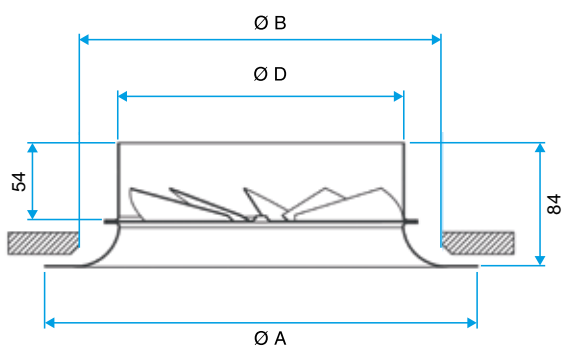

SR 861 diffuser

SR 861 diffuser with LRE plenum

### Airflow data

References	Comfort airflow < 35 dB(A) (m³/h)
11051107	200